

December 20, 2023

#### **Project Description:**

Milwaukee County is moving forward with creating a new 32 bed Secure Residentail Care Center for Children and Youth (SRCCCY). The facility will be located at the current Vel Phillips Youth & Family Justice Center at 10201 W. Watertown Plank Road.

The project includes a new 34,000sf two story addition with renovation of about 8,300sf in the extisting facility. The addition will include two new housing pods for 16 youth, with day rooms and outdoor recreation spaces. The SRCCCY will have a dedicated entrance on the new addition. The project also includes spaces for visition, dinning room, servery and culinary arts classroom, medical and behavioral health area, as well as educational classroom spaces.

The new addition will be connected to the existing facility where two existing MCAP housing pods will be renovated into two 8 bed SRCCCY housing pods. Those spaces will create new shower areas, quiet room and a multi purpose room.

The facility will be a loadbearing concrete masonry unit structure with pre-cast concrete columns and floors. The exterior envelope uses the same brick that is on the existing facility. On the west side of the addition there is an entrance canopy, landscaping and exterior building signage identifing the SRCCCY entrance to visitors and giving facility some presence.

The addition will be located in an existing parking lot on the West side of the facility. To accommodate it the existing service drive will be adjusted, but the main drive aisle maintained with vistor parking added near the entrance. Overall the new construction exterior appearance will be an updated facility that blends into the existing and have a cohesive appearance.

#### **Photos of Existing Front Elevation:**



Existing Building Entrance Facing Watertown Plank Road.



Existing Building Front Elevation along Watertown Plank Road. (West of Entrance)

#### **Photos of Area of Work:**



Area of Existing Building the Addition will go. (Facing East)



Area of Existing Building the Addition will go. (Facing East)



Area of Existing Parking lot the Addition will go. (Facing Southwest)




Area of existing parking lot, roadway where the addition will go. (Facing Southeast)

**BUILDING NO:** CAP PROJECT #: **180802** 

PROJECT STATUS: 50% CD REVIEW SET

**A201** 

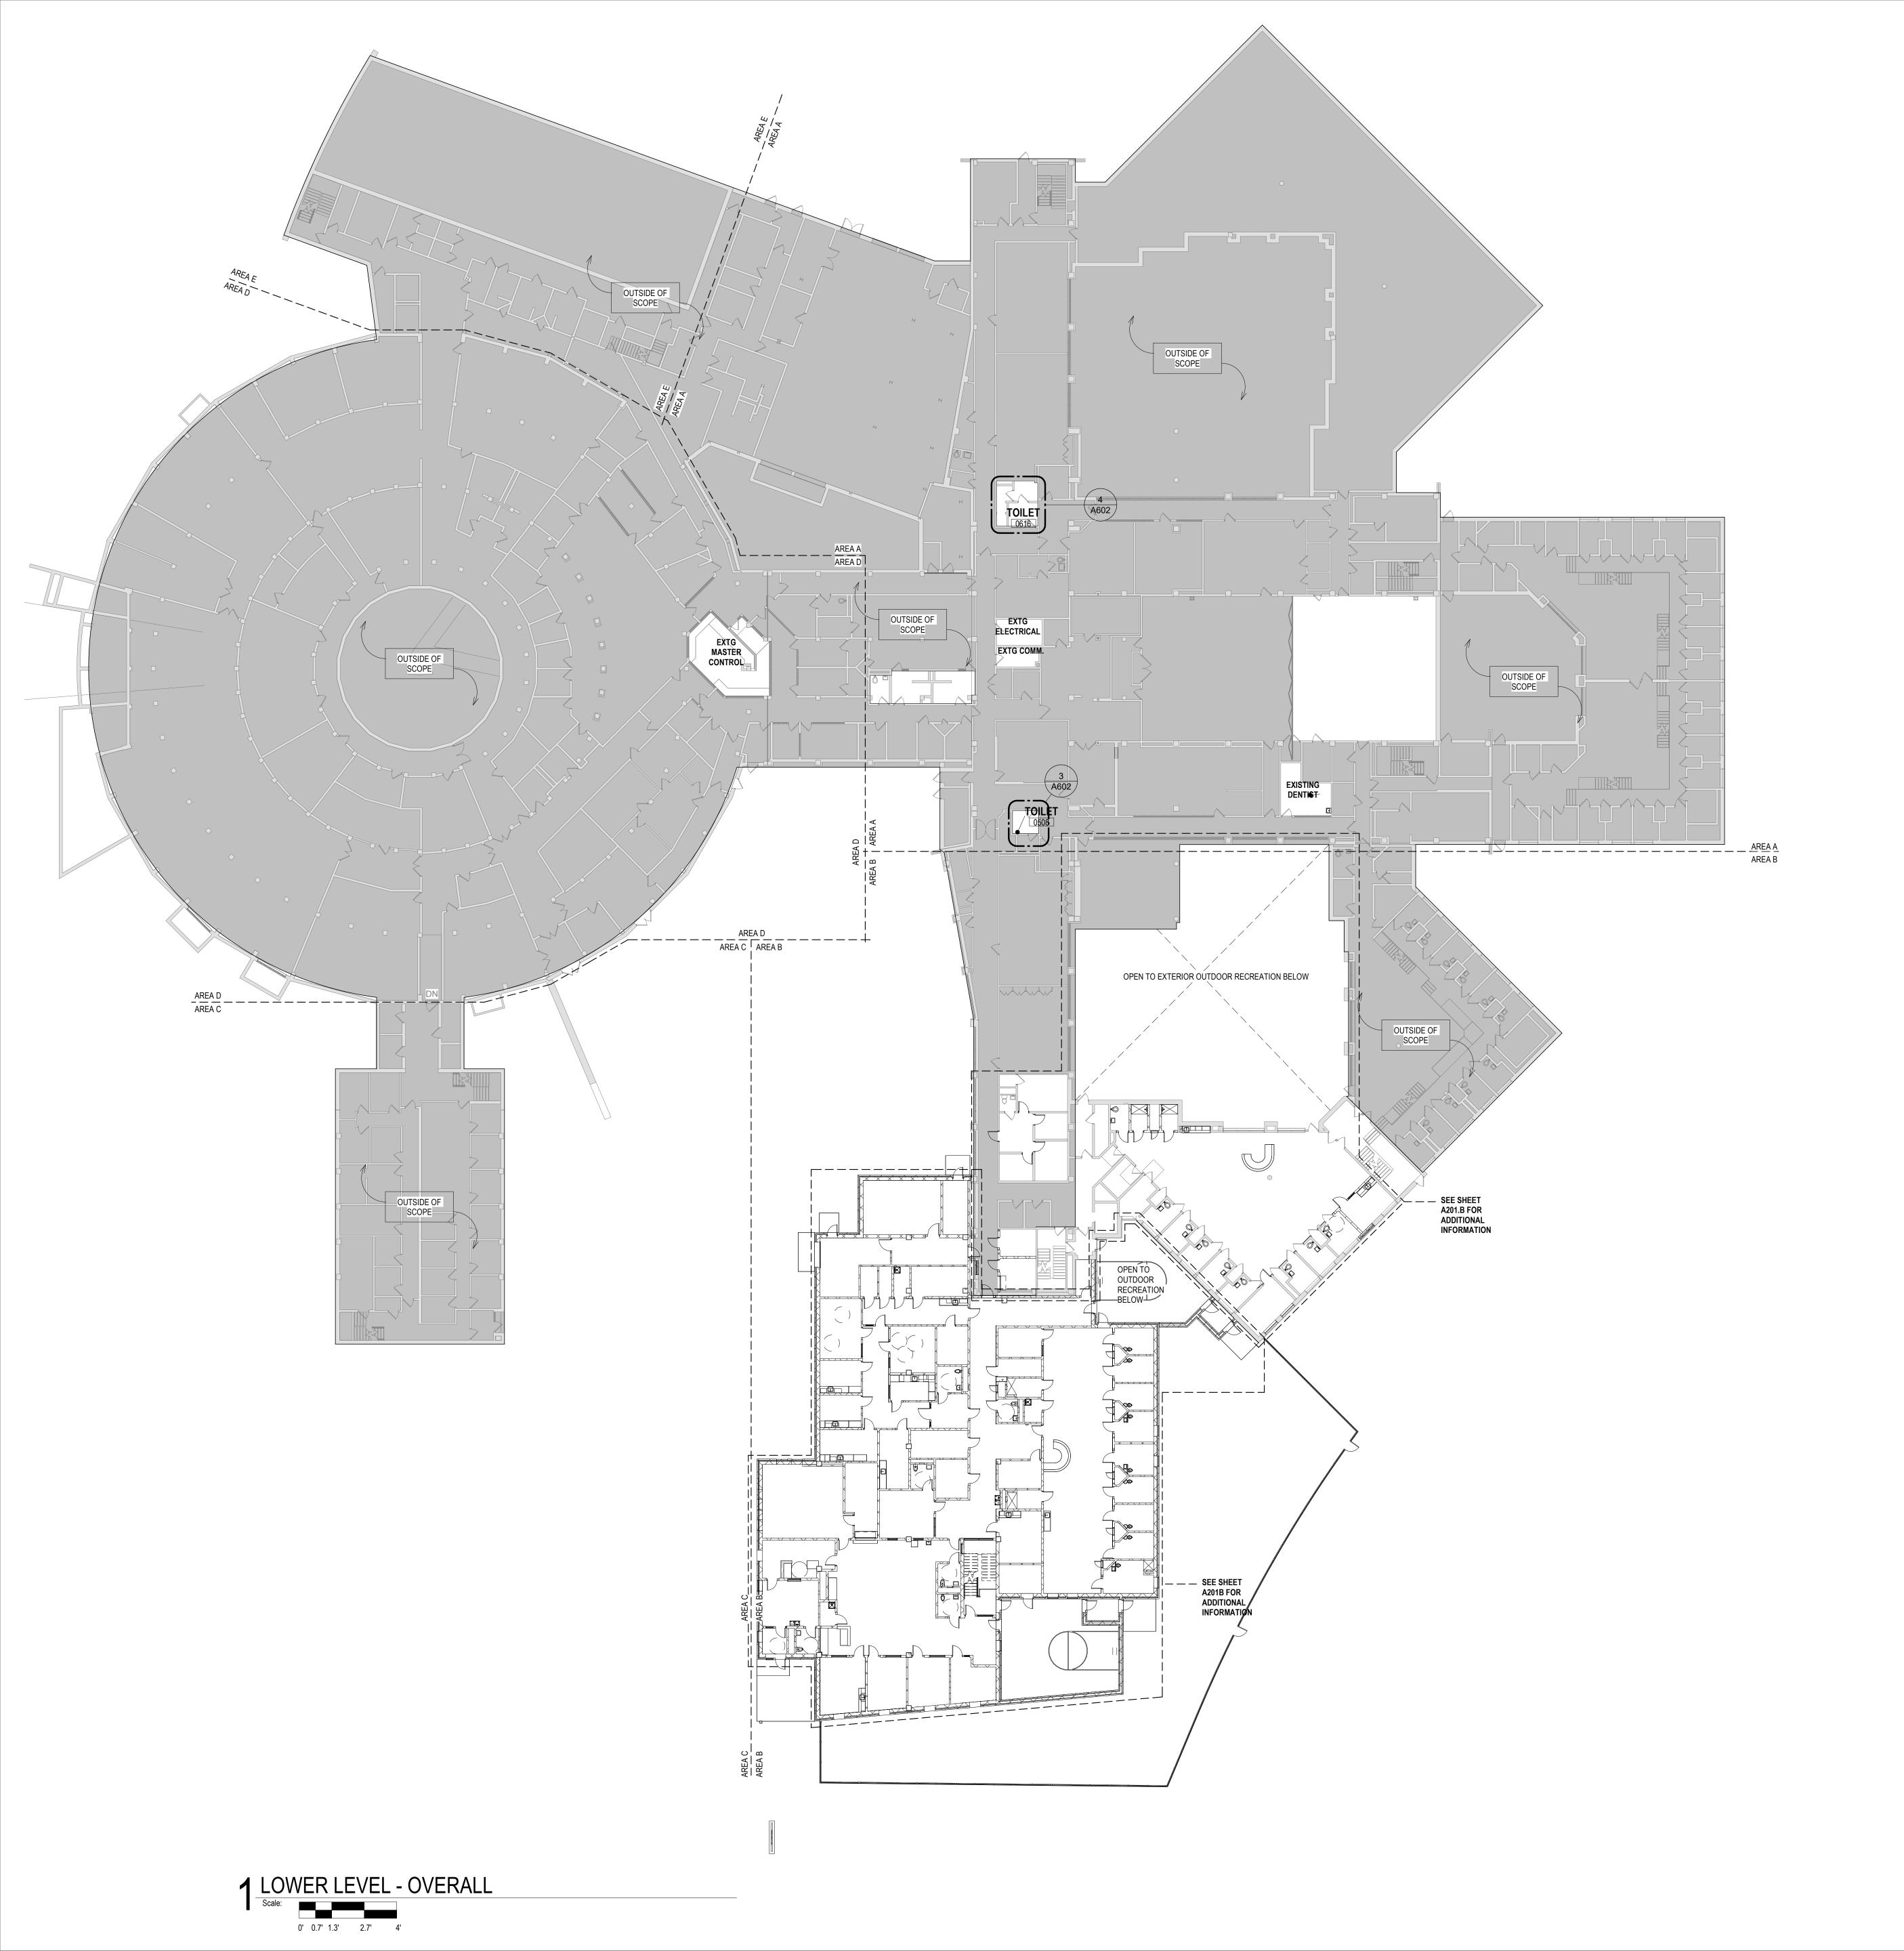

# GENERAL FLOOR PLAN NOTES TO CONTRACTOR

- THIS DRAWING IS FURTHER SUPPORTED BY INFORMATION CONTAINED IN THE SPECIFICATION MANUAL. THE CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, AUDIO-VISUAL, AND SECURITY DRAWINGS ARE SUPPLEMENTARY TO THE ARCHITECTURAL DRAWINGS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE THE INFORMATION CONTAINED IN ALL THE DRAWINGS BEFORE THE INSTALLATION OF ALL
- B. DO NOT SCALE DRAWINGS. CONTRACTOR TO VERIFY ALL CONDITIONS AND DIMENSIONS AT THE JOB SITE PRIOR TO COMMENCING CONSTRUCTION.
- FLOOR ELEVATIONS ARE TO THE TOP OF THE SUB-FLOOR MATERIAL UNLESS OTHERWISE NOTED. CONTRACTORS SHALL JOINTLY PROVIDE AND INSTALL ALL STIFFENERS, BRACING, BACKING PLATES, WALL BLOCKING AND
- SUPPORTING BRACKETS REQUIRED FOR THE INSTALLATION OF CASEWORK, TOILET ACCESSORIES, PARTITIONS.

NEW WORK PLAN LEGEND

EXISTING, TO REMAIN

MASONRY PARTITION, SEE PARTITION TYPES FOR DETAILS

STUD PARTITION, SEE PARTITION TYPES FOR DETAILS

MILLWORK, AND ALL WORK MOUNTED OR SUSPENDED BY ALL TRADES.

## NEW WORK PLAN KEY NOTES

SEE PROJECT GENERAL CONDITIONS, GENERAL INFORMATION ON SHEET A001 AND SELECTIVE DEMOLITION, CUTTING AND PATCHING SPECIFICATIONS THAT ARE USED IN ASSOCIATION WITH THESE NOTES.


- ALIGN WALLS 3 ALIGN FACE OF WALL WITH PRECAST COLUMN
- 4 MOVEABLE PARTITION FIXED IN PLACE
- 5 EXISTING DOOR LOCKED AND NOT FOR USE 6 EXISTING DRINKING FOUNTAIN TO REMAIN
- CONCRETE-FILLED METAL PAN STAIR (90 DEG RISERS) WITH LIGTATURE-RESISTANT STEEL RAILINGS AND STAINLESS STEEL ANTI-MICROBIAL HANDRAIL. FINISH ALL LANDINGS, TREADS AND RISERS WITH ERF-1. FINISH STEEL STRINGERS AND UNDERSIDE OF STAIR WITH HPC-2.
- 8 INFILL EXISTING WINDOW OPENINGS ABOVE. SEE INFILL DETAIL. COORDINATE WITH SECURE PERIMETER DETAILS.
- PREFINISHED METEL DETENTION WINDOW ASSEMBLY IN NEW MASONRY OPENING. AT EXISTING CONTROL DESK REMOVAL. IF EXISTING FLOORING DID NOT RUN UNDER EXISTING CONTROL DESK. CONTRACTOR TO PREPARE EXISTING FLOOR FOR NEW FINISHES.
- CONTRACTOR TO PATCH FLOORS AND MASONRY WALLS AT EXISTING CONCRETE BED OR CONCRETE BENCH REMOVAL AND PREPARE FLOOR FOR NEW FINISHES. REINSTALL SALVAGED TILE AT SAW CUT FLOOR AREA. PATCH ALL EXISTING DISTURBED MASONRY WALL SURFACES THROUGHOUT ROOM
- TO MATCH EXISTING, AT EXISTING WALL DEMO'D LOCATIONS. PATCH ALL EXISTING DISTURBED WALL SURFACES THROUGHOUT ROOM TO MATCH EXISTING, AT EXISTING WALL DEMO'D LOCATIONS. PATCHING REQUIRED AT EXISTING FLOOR ASSEMBLY AT PLUMBING STACK
- REMOVAL AND PLUMBING WATER REMOVAL . COORDINATE WITH PLUMBING CONTRACTOR. NEW INFILL FLOOR ASSEMBLY TO MATCH EXISTING FLOOR ASSEMBLY AT EXISTING CHASE LOCATION. COORDINATE WITH PLUMBING CONTRACTOR.
- 6 INFILL EXISTING DOOR OPENING. SEE INFILL DETAIL. COORDINATE WITH SECURE PERIMETER DETAILS.
- REINSTALL SECURITY SCREEEN AT WINDOW OPENINGS. 18 INFILL EXISTING WINDOW, COORDINATE WITH STRUCTURAL AND NEW FLOOR
- MASON TO TOOTH IN EXISTING MASONRY THAT WAS REMOVED FOR STRUCTURAL COORDINATION AT NEW FLOOR LEVEL. COORDINATE WITH STRUCTURAL AND NEW
- MASON TO TOOTH IN EXISTING MASONRY THAT WAS REMOVED FOR STRUCTURAL COORDINATION AT NEW ANGLE AND PLATE LOCATIONS.. COORDINATE WITH STRUCTURAL AND NEW FLOOR PLANS. 2 HOUR FIREPROOFING REQUIRED AT NEW STEEL ANGLE
- RELOCATED EXISTING SHELVING 24 EXISTING GYMNASIUM FLOORING TO BE REFINISHED ANS RESTRIPED AFTER
- TEMPORARY OCCUPNACY
- 25 NEW CONCRETE FLOOR SLAB INFILL AT FLOOR SLAB REMOVAL, MATCH EXISTING CONCRETE SLAB

NOT FOR CONSTRUCTION THESE DRAWINGS ARE RELEASED FOR DESIGN DEVELOPMENT PURPOSES ONLY. THEY ARE NOT TO BE USED FOR REGULATORY APPROVAL, PERMIT, OR CONSTRUCTION PURPOSES.

**LOWER LEVEL PLAN - OVERALL** 

CAP PROJECT #: **180802** PROJECT STATUS: 50% CD REVIEW SET

A201B

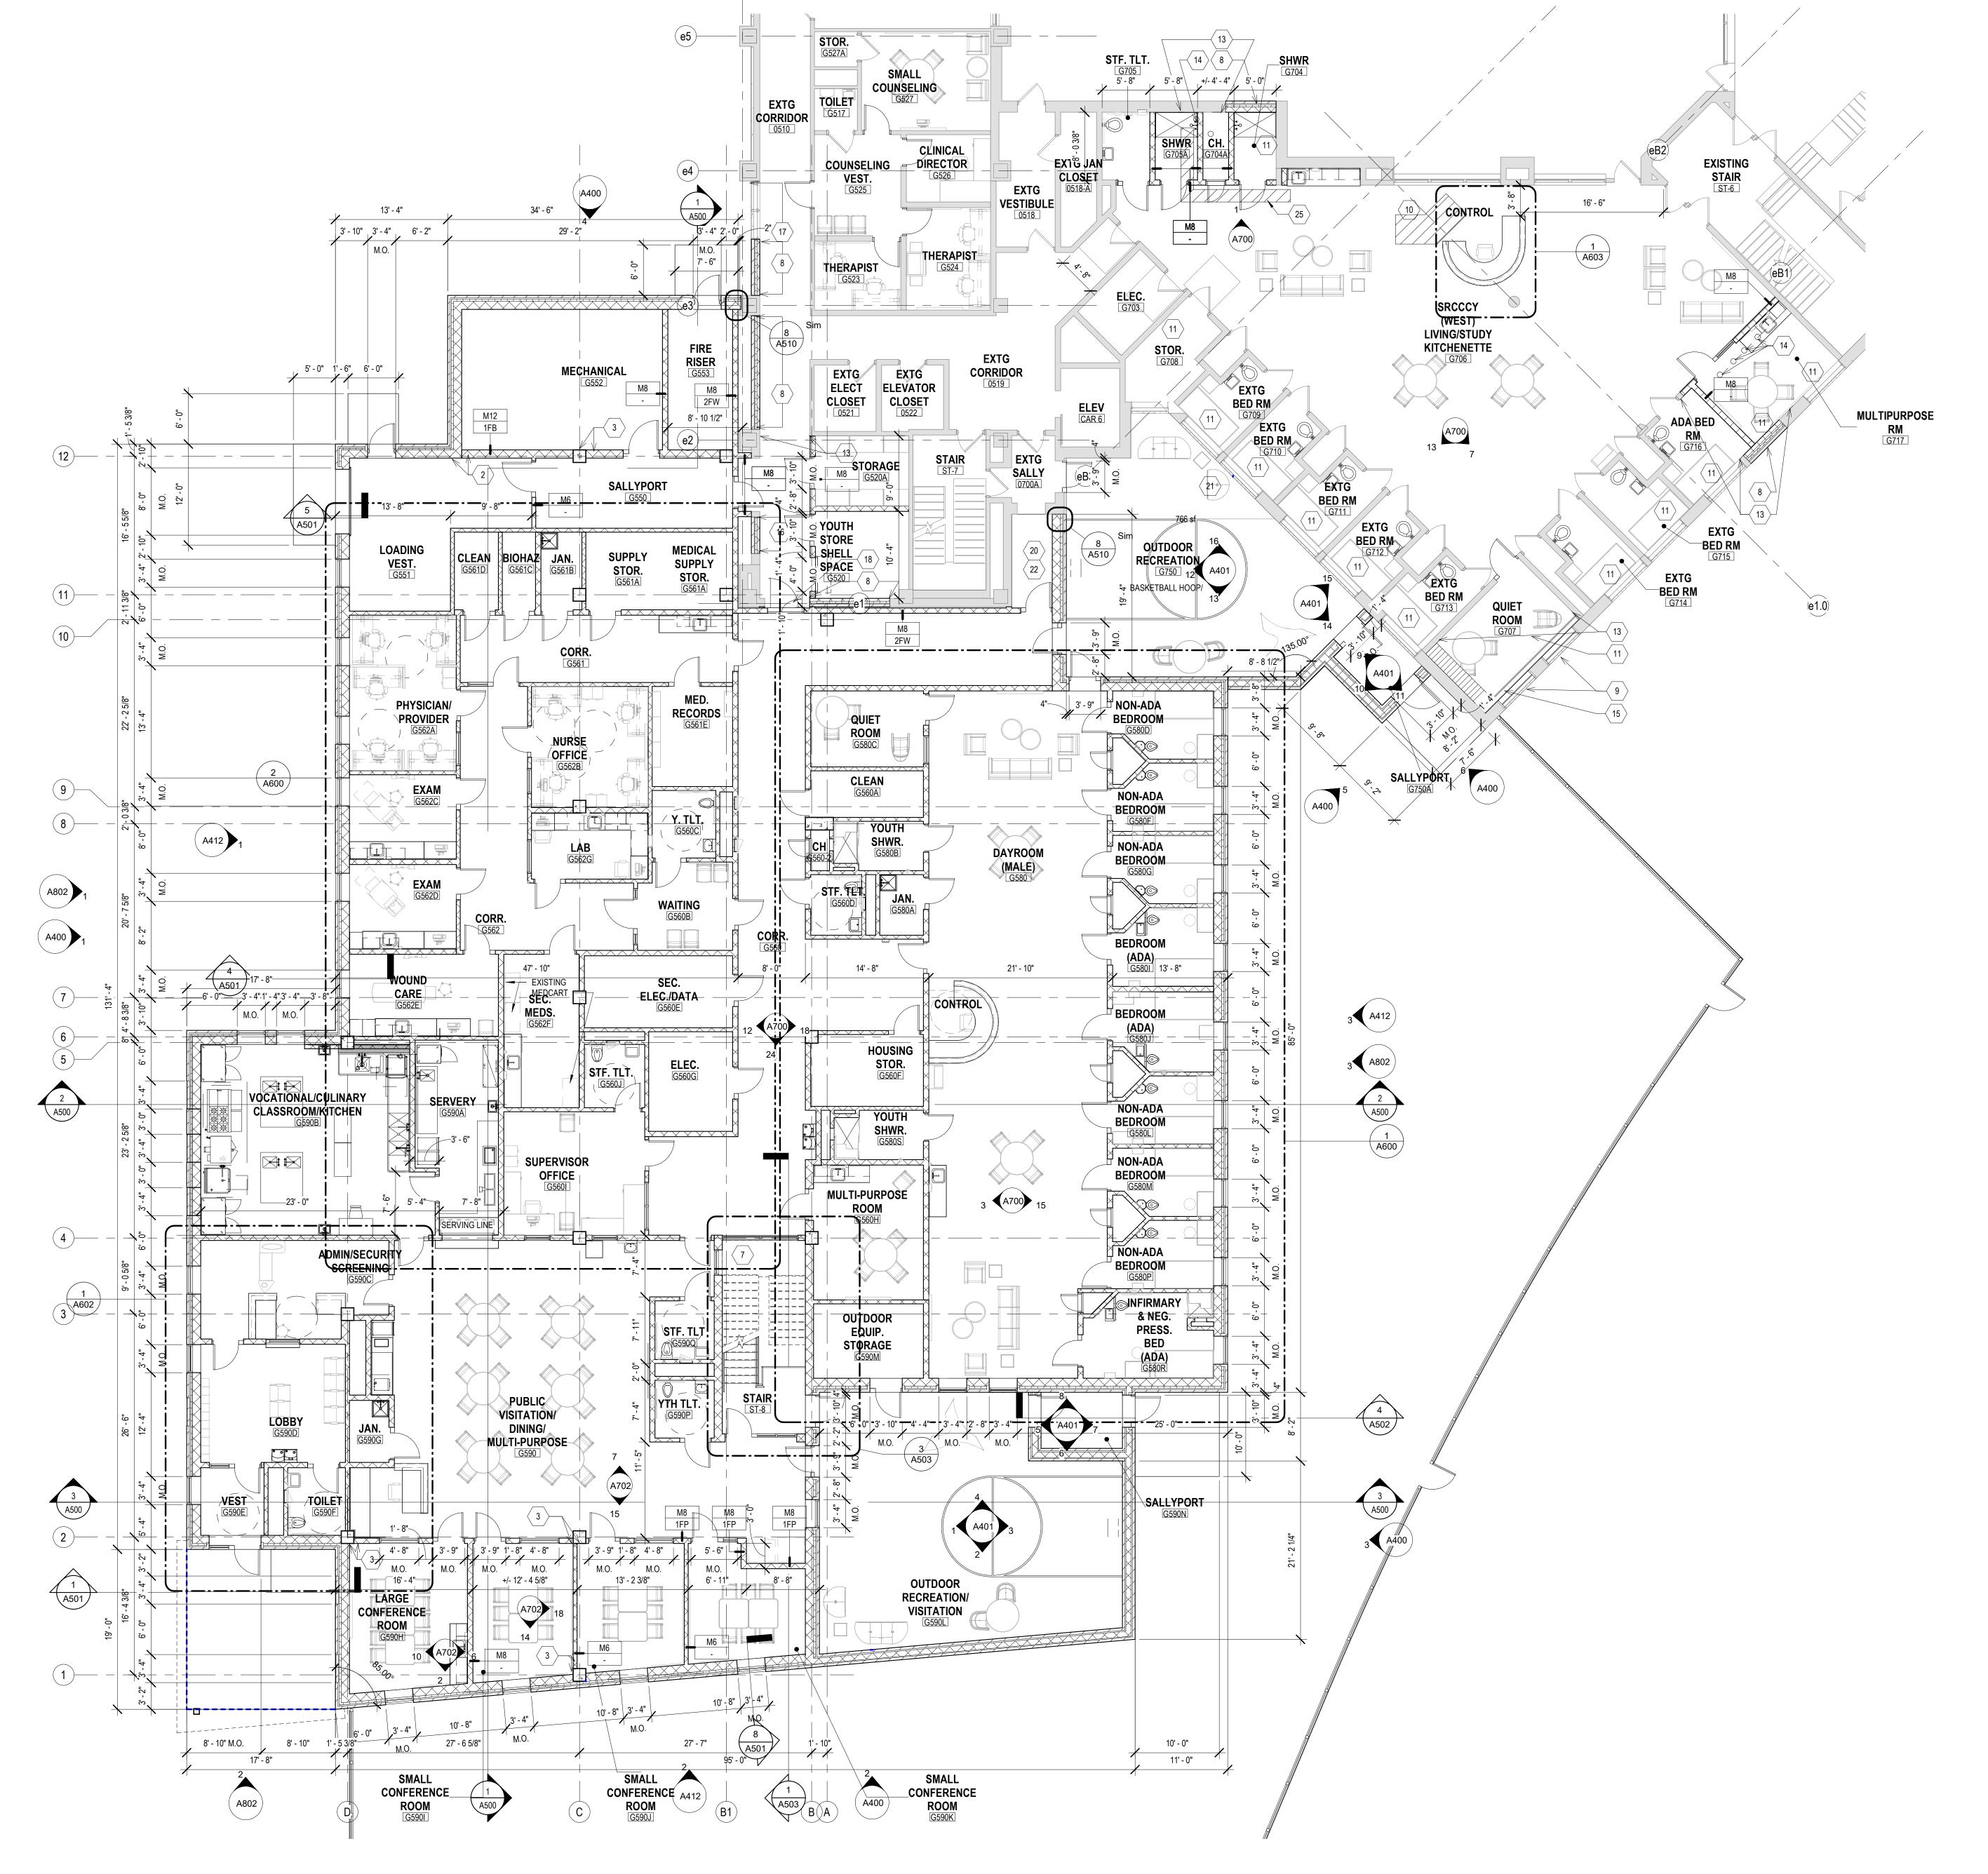

GENERAL FLOOR PLAN NOTES TO CONTRACTOR

- 1. THIS DRAWING IS FURTHER SUPPORTED BY INFORMATION CONTAINED IN THE SPECIFICATION MANUAL THE CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, AUDIO-VISUAL, AND SECURITY DRAWINGS ARE SUPPLEMENTARY TO THE ARCHITECTURAL DRAWINGS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE THE INFORMATION CONTAINED IN ALL THE DRAWINGS BEFORE THE INSTALLATION OF ALL
  - DO NOT SCALE DRAWINGS. CONTRACTOR TO VERIFY ALL CONDITIONS AND DIMENSIONS AT THE JOB SITE PRIOR TO COMMENCING CONSTRUCTION.
- FLOOR ELEVATIONS ARE TO THE TOP OF THE SUB-FLOOR MATERIAL UNLESS OTHERWISE NOTED. CONTRACTORS SHALL JOINTLY PROVIDE AND INSTALL ALL STIFFENERS, BRACING, BACKING PLATES, WALL BLOCKING AND SUPPORTING BRACKETS REQUIRED FOR THE INSTALLATION OF CASEWORK, TOILET ACCESSORIES, PARTITIONS.

## NEW WORK PLAN LEGEND

EXISTING, TO REMAIN

MASONRY PARTITION, SEE PARTITION TYPES FOR DETAILS STUD PARTITION, SEE PARTITION TYPES FOR DETAILS

#### NEW WORK PLAN KEY NOTES

MILLWORK, AND ALL WORK MOUNTED OR SUSPENDED BY ALL TRADES.

SEE PROJECT GENERAL CONDITIONS, GENERAL INFORMATION ON SHEET A001 AND SELECTIVE DEMOLITION, CUTTING AND PATCHING SPECIFICATIONS THAT ARE USED IN ASSOCIATION WITH THESE NOTES.

- ALIGN FACE OF WALL WITH PRECAST COLUMN 4 MOVEABLE PARTITION FIXED IN PLACE
- 5 EXISTING DOOR LOCKED AND NOT FOR USE
- 6 EXISTING DRINKING FOUNTAIN TO REMAIN CONCRETE-FILLED METAL PAN STAIR (90 DEG RISERS) WITH LIGTATURE-RESISTANT
- STEEL RAILINGS AND STAINLESS STEÈL ANTI-MICROBÍAL HANDRAIL. FINISH ALL LANDINGS, TREADS AND RISERS WITH ERF-1. FINISH STEEL STRINGERS AND UNDERSIDE OF STAIR WITH HPC-2. 8 INFILL EXISTING WINDOW OPENINGS ABOVE. SEE INFILL DETAIL. COORDINATE WITH
- SECURE PERIMETER DETAILS. PREFINISHED METEL DETENTION WINDOW ASSEMBLY IN NEW MASONRY OPENING 10 AT EXISTING CONTROL DESK REMOVAL. IF EXISTING FLOORING DID NOT RUN
- UNDER EXISTING CONTROL DESK. CONTRACTOR TO PREPARE EXISTING FLOOR FOR NEW FINISHES. 1 CONTRACTOR TO PATCH FLOORS AND MASONRY WALLS AT EXISTING CONCRETE
- BED OR CONCRETE BENCH REMOVAL AND PREPARE FLOOR FOR NEW FINISHES. 2 REINSTALL SALVAGED TILE AT SAW CUT FLOOR AREA. 13 PATCH ALL EXISTING DISTURBED MASONRY WALL SURFACES THROUGHOUT ROOM
- TO MATCH EXISTING, AT EXISTING WALL DEMO'D LOCATIONS. 3 PATCH ALL EXISTING DISTURBED WALL SURFACES THROUGHOUT ROOM TO MATC EXISTING, AT EXISTING WALL DEMO'D LOCATIONS. 4 PATCHING REQUIRED AT EXISTING FLOOR ASSEMBLY AT PLUMBING STACK
- REMOVAL AND PLUMBING WATER REMOVAL . COORDINATE WITH PLUMBING 15 NEW INFILL FLOOR ASSEMBLY TO MATCH EXISTING FLOOR ASSEMBLY AT EXISTING
- CHASE LOCATION. COORDINATE WITH PLUMBING CONTRACTOR. 16 INFILL EXISTING DOOR OPENING. SEE INFILL DETAIL. COORDINATE WITH SECURE PERIMETER DETAILS.
- 17 REINSTALL SECURITY SCREEEN AT WINDOW OPENINGS. 18 INFILL EXISTING WINDOW, COORDINATE WITH STRUCTURAL AND NEW FLOOR
- MASON TO TOOTH IN EXISTING MASONRY THAT WAS REMOVED FOR STRUCTURAL COORDINATION AT NEW FLOOR LEVEL. COORDINATE WITH STRUCTURAL AND NEW MASON TO TOOTH IN EXISTING MASONRY THAT WAS REMOVED FOR STRUCTURAL
- COORDINATION AT NEW ANGLE AND PLATE LOCATIONS.. COORDINATE WITH STRUCTURAL AND NEW FLOOR PLANS.
- 2 HOUR FIREPROOFING REQUIRED AT NEW STEEL ANGL 23 RELOCATED EXISTING SHELVING
- 24 EXISTING GYMNASIUM FLOORING TO BE REFINISHED ANS RESTRIPED AFTER
- TEMPORARY OCCUPNACY 25 NEW CONCRETE FLOOR SLAB INFILL AT FLOOR SLAB REMOVAL, MATCH EXISTING

NOT FOR CONSTRUCTION THESE DRAWINGS ARE RELEASED FOR DESIGN DEVELOPMENT PURPOSES ONLY. THEY ARE NOT TO BE USED FOR REGULATORY APPROVAL, PERMIT, OR CONSTRUCTION PURPOSES .

LOWER LEVEL PLAN - AREA B

1 LOWER LEVEL PLAN - AREA B


0' 0.7' 1.3' 2.7' 4'

**REVISIONS:** 

CAP PROJECT #: **180802** 

PROJECT STATUS: 50% CD REVIEW SET

MAIN LEVEL PLAN - OVERALL

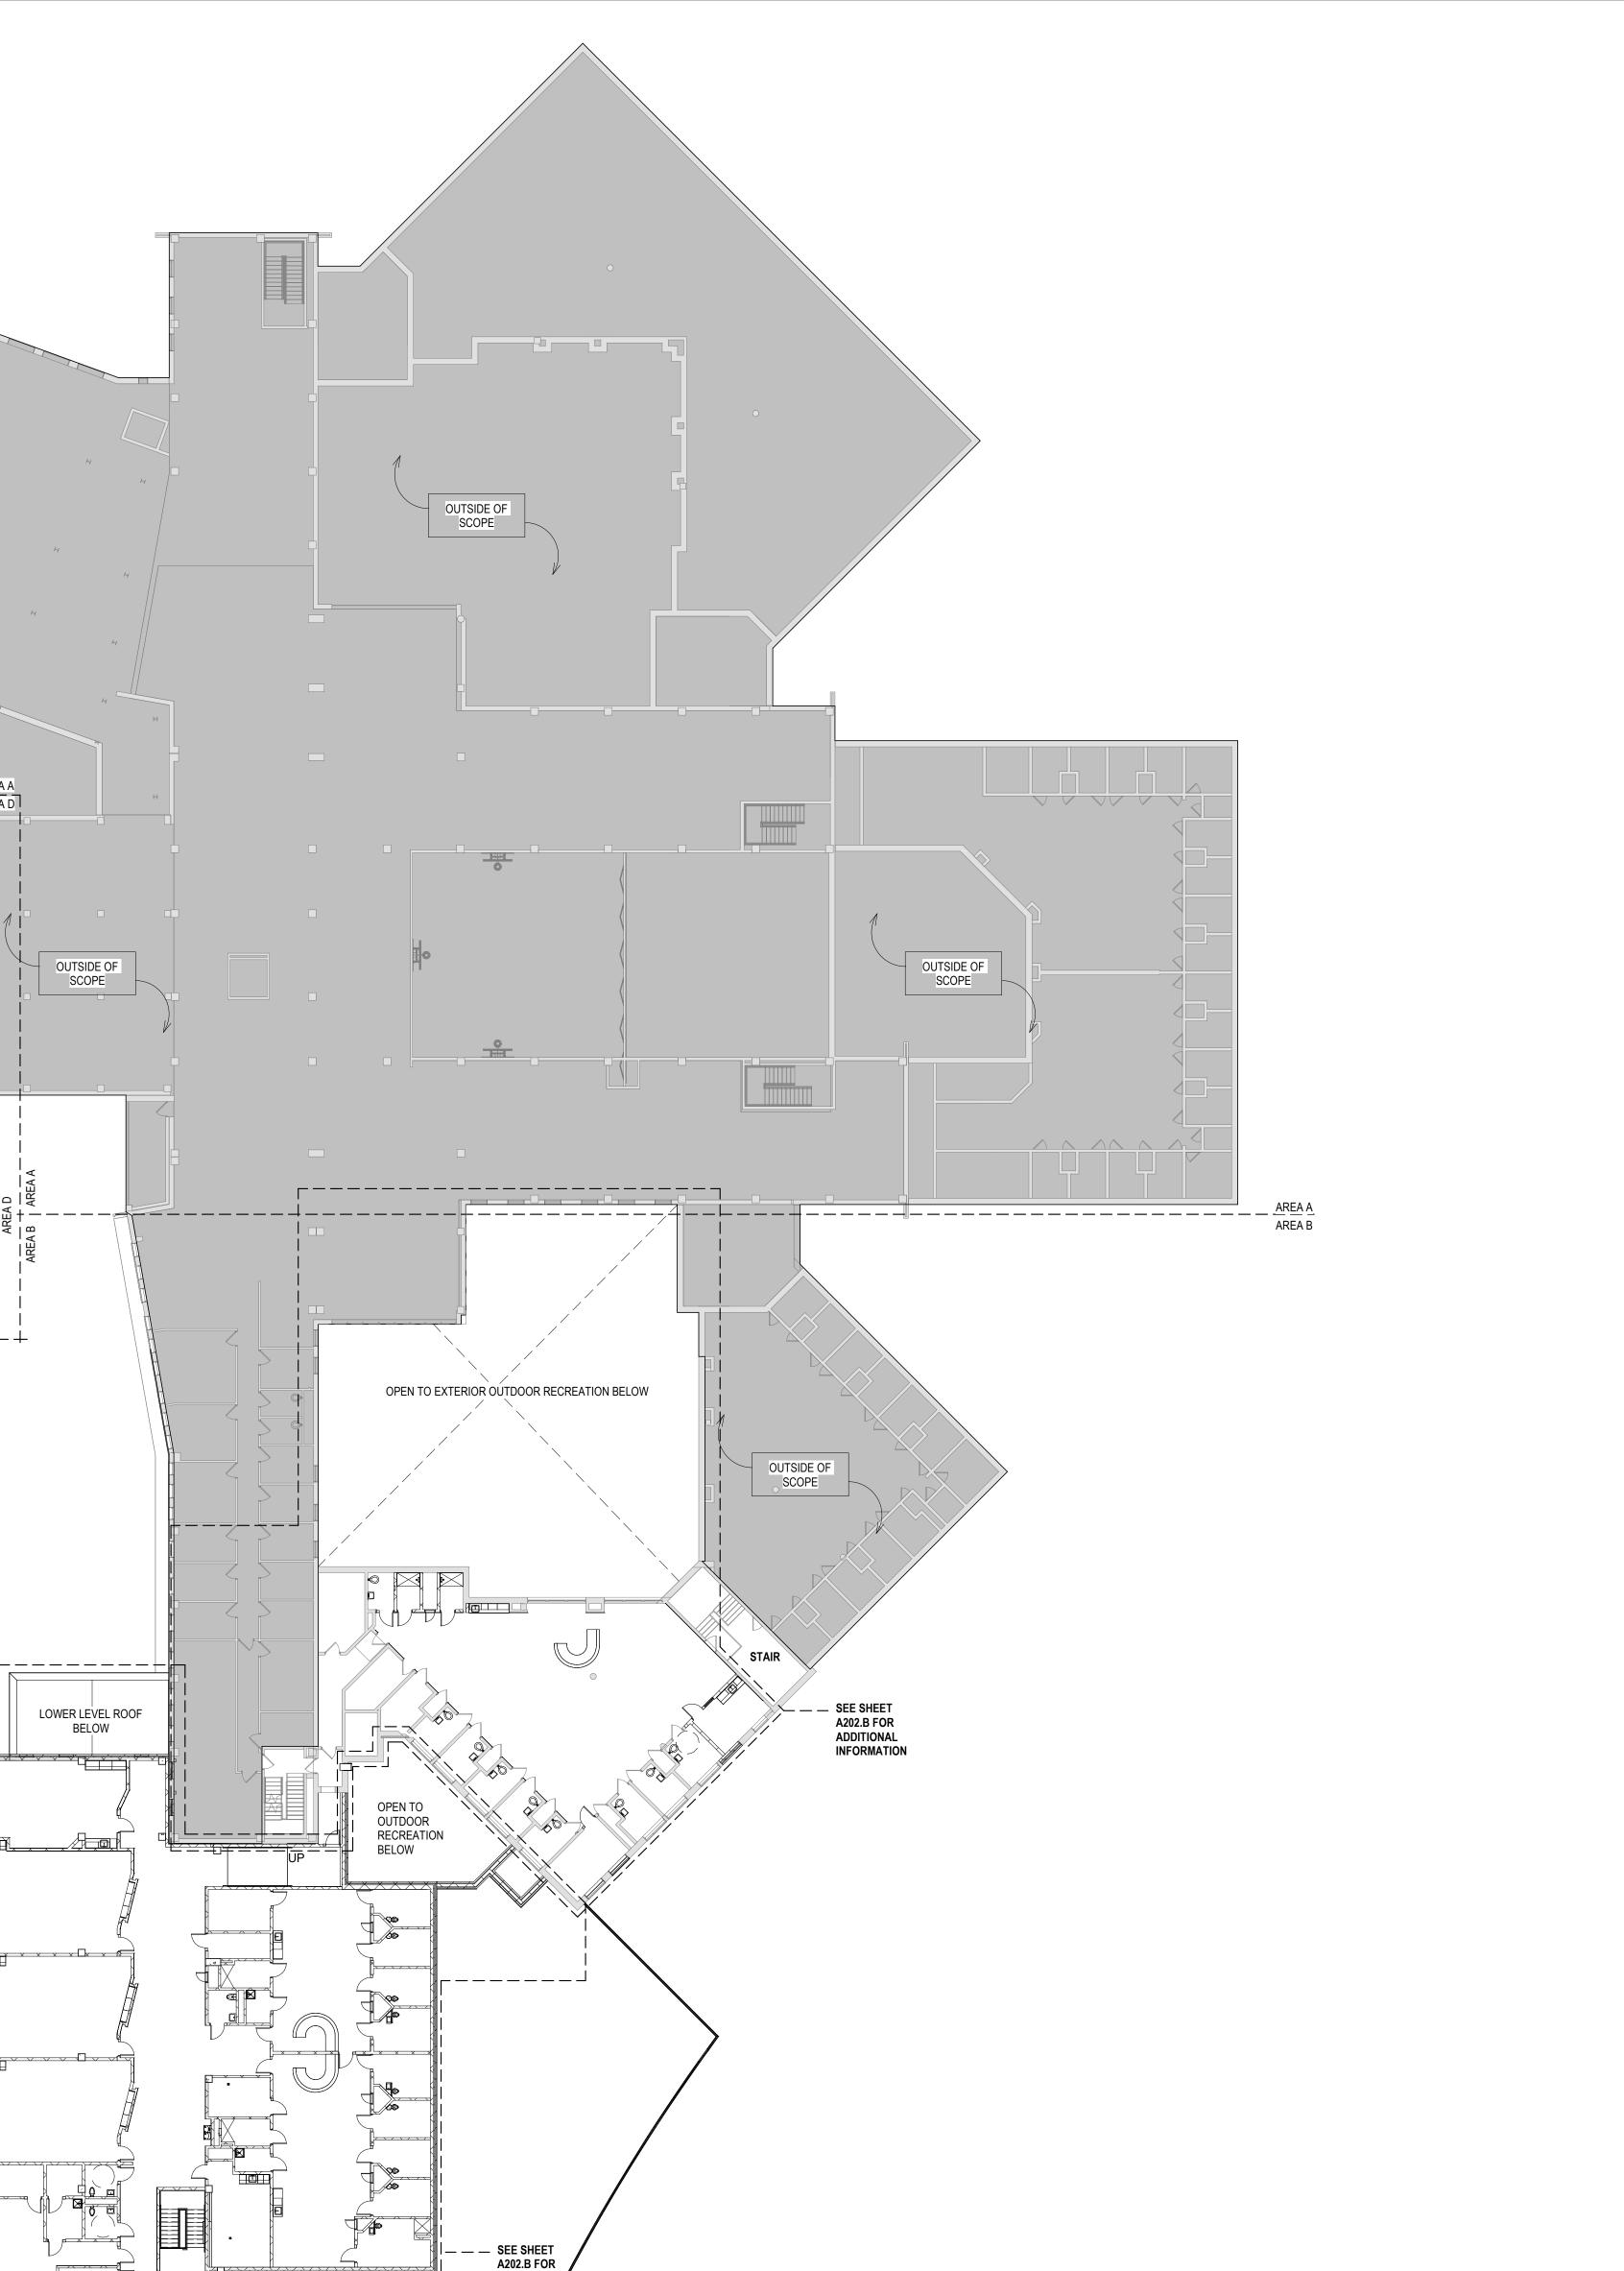

OUTSIDE OF

SCOPE

OUTSIDE OF

\_\_\_\_\_

LOWER LEVEL ROOF

LOWER LEVEL ROOF

SCOPE

OPEN TO OUTDOOR RECREATION BELOW

OUTDOOR RECREATION

ADDITIONAL INFORMATION

GENERAL FLOOR PLAN NOTES TO CONTRACTOR THIS DRAWING IS FURTHER SUPPORTED BY INFORMATION CONTAINED IN THE SPECIFICATION MANUAL. THE CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, AUDIO-VISUAL, AND SECURITY

CONTRACTOR TO COORDINATE THE INFORMATION CONTAINED IN ALL THE DRAWINGS BEFORE THE INSTALLATION OF ALL 3. DO NOT SCALE DRAWINGS. CONTRACTOR TO VERIFY ALL CONDITIONS AND DIMENSIONS AT THE JOB SITE PRIOR TO

DRAWINGS ARE SUPPLEMENTARY TO THE ARCHITECTURAL DRAWINGS. IT SHALL BE THE RESPONSIBILITY OF THE

COMMENCING CONSTRUCTION.

FLOOR ELEVATIONS ARE TO THE TOP OF THE SUB-FLOOR MATERIAL UNLESS OTHERWISE NOTED. CONTRACTORS SHALL JOINTLY PROVIDE AND INSTALL ALL STIFFENERS, BRACING, BACKING PLATES, WALL BLOCKING AND

NEW WORK PLAN LEGEND

SUPPORTING BRACKETS REQUIRED FOR THE INSTALLATION OF CASEWORK, TOILET ACCESSORIES, PARTITIONS.

EXISTING, TO REMAIN

MASONRY PARTITION, SEE PARTITION TYPES FOR DETAILS

MILLWORK, AND ALL WORK MOUNTED OR SUSPENDED BY ALL TRADES.

STUD PARTITION, SEE PARTITION TYPES FOR DETAILS

## NEW WORK PLAN KEY NOTES

SEE PROJECT GENERAL CONDITIONS, GENERAL INFORMATION ON SHEET A001 AND SELECTIVE DEMOLITION, CUTTING AND PATCHING SPECIFICATIONS THAT ARE USED IN ASSOCIATION WITH THESE NOTES.

- ALIGN WALLS 3 ALIGN FACE OF WALL WITH PRECAST COLUMN
- 4 MOVEABLE PARTITION FIXED IN PLACE
- 5 EXISTING DOOR LOCKED AND NOT FOR USE 6 EXISTING DRINKING FOUNTAIN TO REMAIN
- CONCRETE-FILLED METAL PAN STAIR (90 DEG RISERS) WITH LIGTATURE-RESISTANT STEEL RAILINGS AND STAINLESS STEEL ANTI-MICROBÍAL HANDRAIL. FINISH ALL LANDINGS, TREADS AND RISERS WITH ERF-1. FINISH STEEL STRINGERS AND
- UNDERSIDE OF STAIR WITH HPC-2. 8 INFILL EXISTING WINDOW OPENINGS ABOVE. SEE INFILL DETAIL. COORDINATE WITH SECURE PERIMETER DETAILS.
- 9 PREFINISHED METEL DETENTION WINDOW ASSEMBLY IN NEW MASONRY OPENING. 10 AT EXISTING CONTROL DESK REMOVAL. IF EXISTING FLOORING DID NOT RUN UNDER EXISTING CONTROL DESK. CONTRACTOR TO PREPARE EXISTING FLOOR FOR NEW FINISHES.
- 1 CONTRACTOR TO PATCH FLOORS AND MASONRY WALLS AT EXISTING CONCRETE BED OR CONCRETE BENCH REMOVAL AND PREPARE FLOOR FOR NEW FINISHES. REINSTALL SALVAGED TILE AT SAW CUT FLOOR AREA. PATCH ALL EXISTING DISTURBED MASONRY WALL SURFACES THROUGHOUT ROOM
- TO MATCH EXISTING, AT EXISTING WALL DEMO'D LOCATIONS. PATCH ALL EXISTING DISTURBED WALL SURFACES THROUGHOUT ROOM TO MATCH EXISTING, AT EXISTING WALL DEMO'D LOCATIONS. PATCHING REQUIRED AT EXISTING FLOOR ASSEMBLY AT PLUMBING STACK
- REMOVAL AND PLUMBING WATER REMOVAL . COORDINATE WITH PLUMBING CONTRACTOR. NEW INFILL FLOOR ASSEMBLY TO MATCH EXISTING FLOOR ASSEMBLY AT EXISTING CHASE LOCATION. COORDINATE WITH PLUMBING CONTRACTOR.
- 16 INFILL EXISTING DOOR OPENING. SEE INFILL DETAIL. COORDINATE WITH SECURE PERIMETER DETAILS. REINSTALL SECURITY SCREEEN AT WINDOW OPENINGS.
- MASON TO TOOTH IN EXISTING MASONRY THAT WAS REMOVED FOR STRUCTURAL COORDINATION AT NEW FLOOR LEVEL. COORDINATE WITH STRUCTURAL AND NEW

18 INFILL EXISTING WINDOW, COORDINATE WITH STRUCTURAL AND NEW FLOOR

- MASON TO TOOTH IN EXISTING MASONRY THAT WAS REMOVED FOR STRUCTURAL COORDINATION AT NEW ANGLE AND PLATE LOCATIONS.. COORDINATE WITH STRUCTURAL AND NEW FLOOR PLANS. 2 HOUR FIREPROOFING REQUIRED AT NEW STEEL ANGLE
- RELOCATED EXISTING SHELVING
- 24 EXISTING GYMNASIUM FLOORING TO BE REFINISHED ANS RESTRIPED AFTER TEMPORARY OCCUPNACY
- 25 NEW CONCRETE FLOOR SLAB INFILL AT FLOOR SLAB REMOVAL, MATCH EXISTING CONCRETE SLAB

NOT FOR CONSTRUCTION THESE DRAWINGS ARE RELEASED FOR DESIGN DEVELOPMENT PURPOSES ONLY. THEY ARE NOT TO BE USED FOR REGULATORY APPROVAL, PERMIT, OR CONSTRUCTION PURPOSES.

↑ MAIN LEVEL - OVERALL 0' 0.7' 1.3' 2.7' 4'

OUTSIDE OF

AREA D AREA C

SCOPE

OUTSIDE OF SCOPE


OUTSIDE OF

SCOPE


**A202** 

CAP PROJECT #: **180802** PROJECT STATUS: 50% CD REVIEW SET

MAIN LEVEL PLAN - AREA B

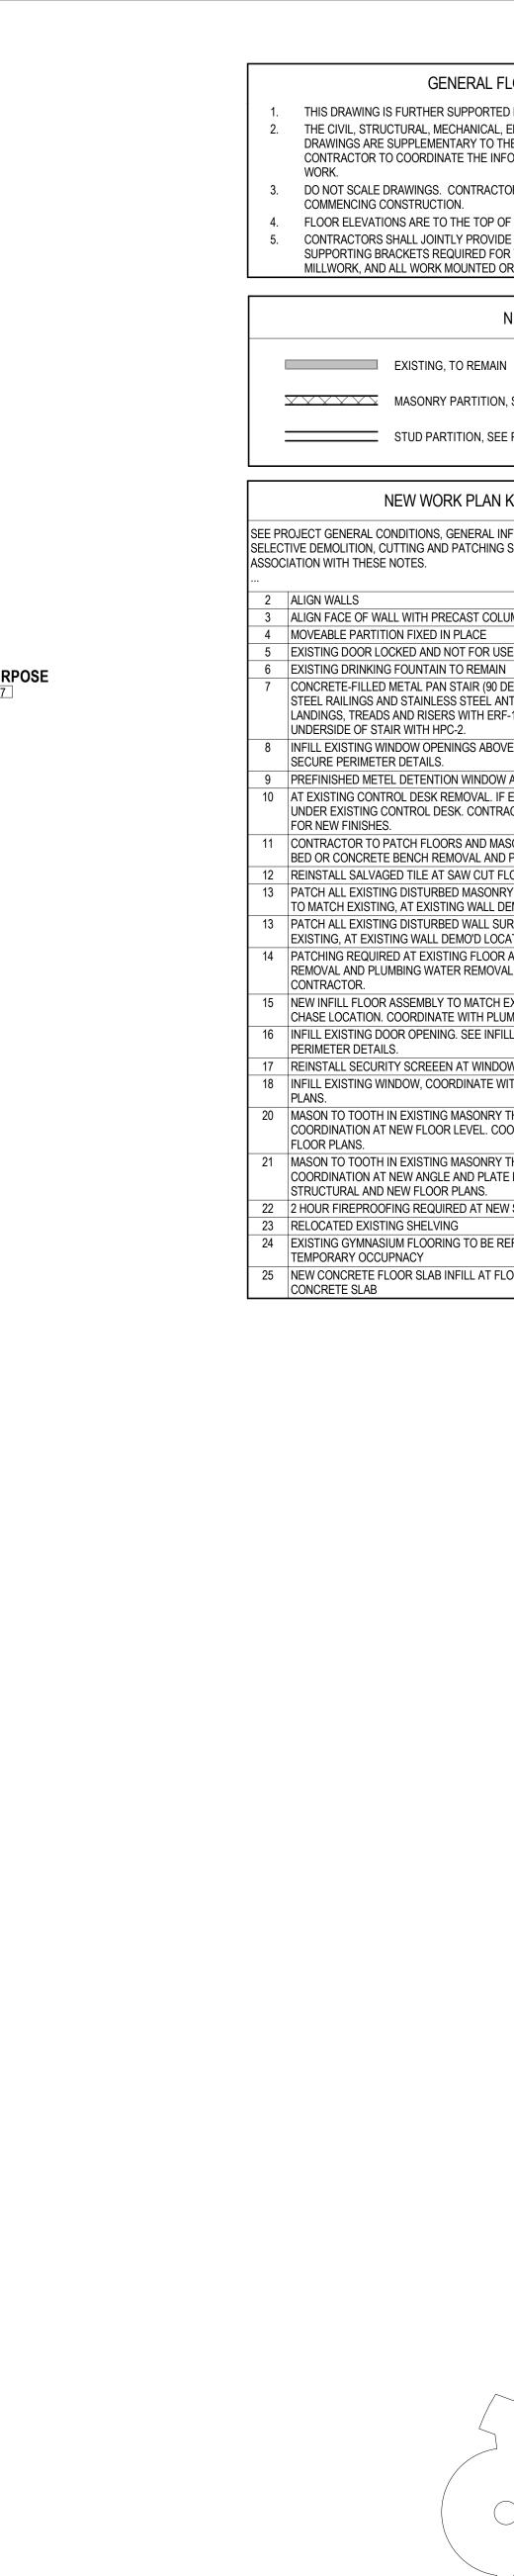

STAIR ST-6

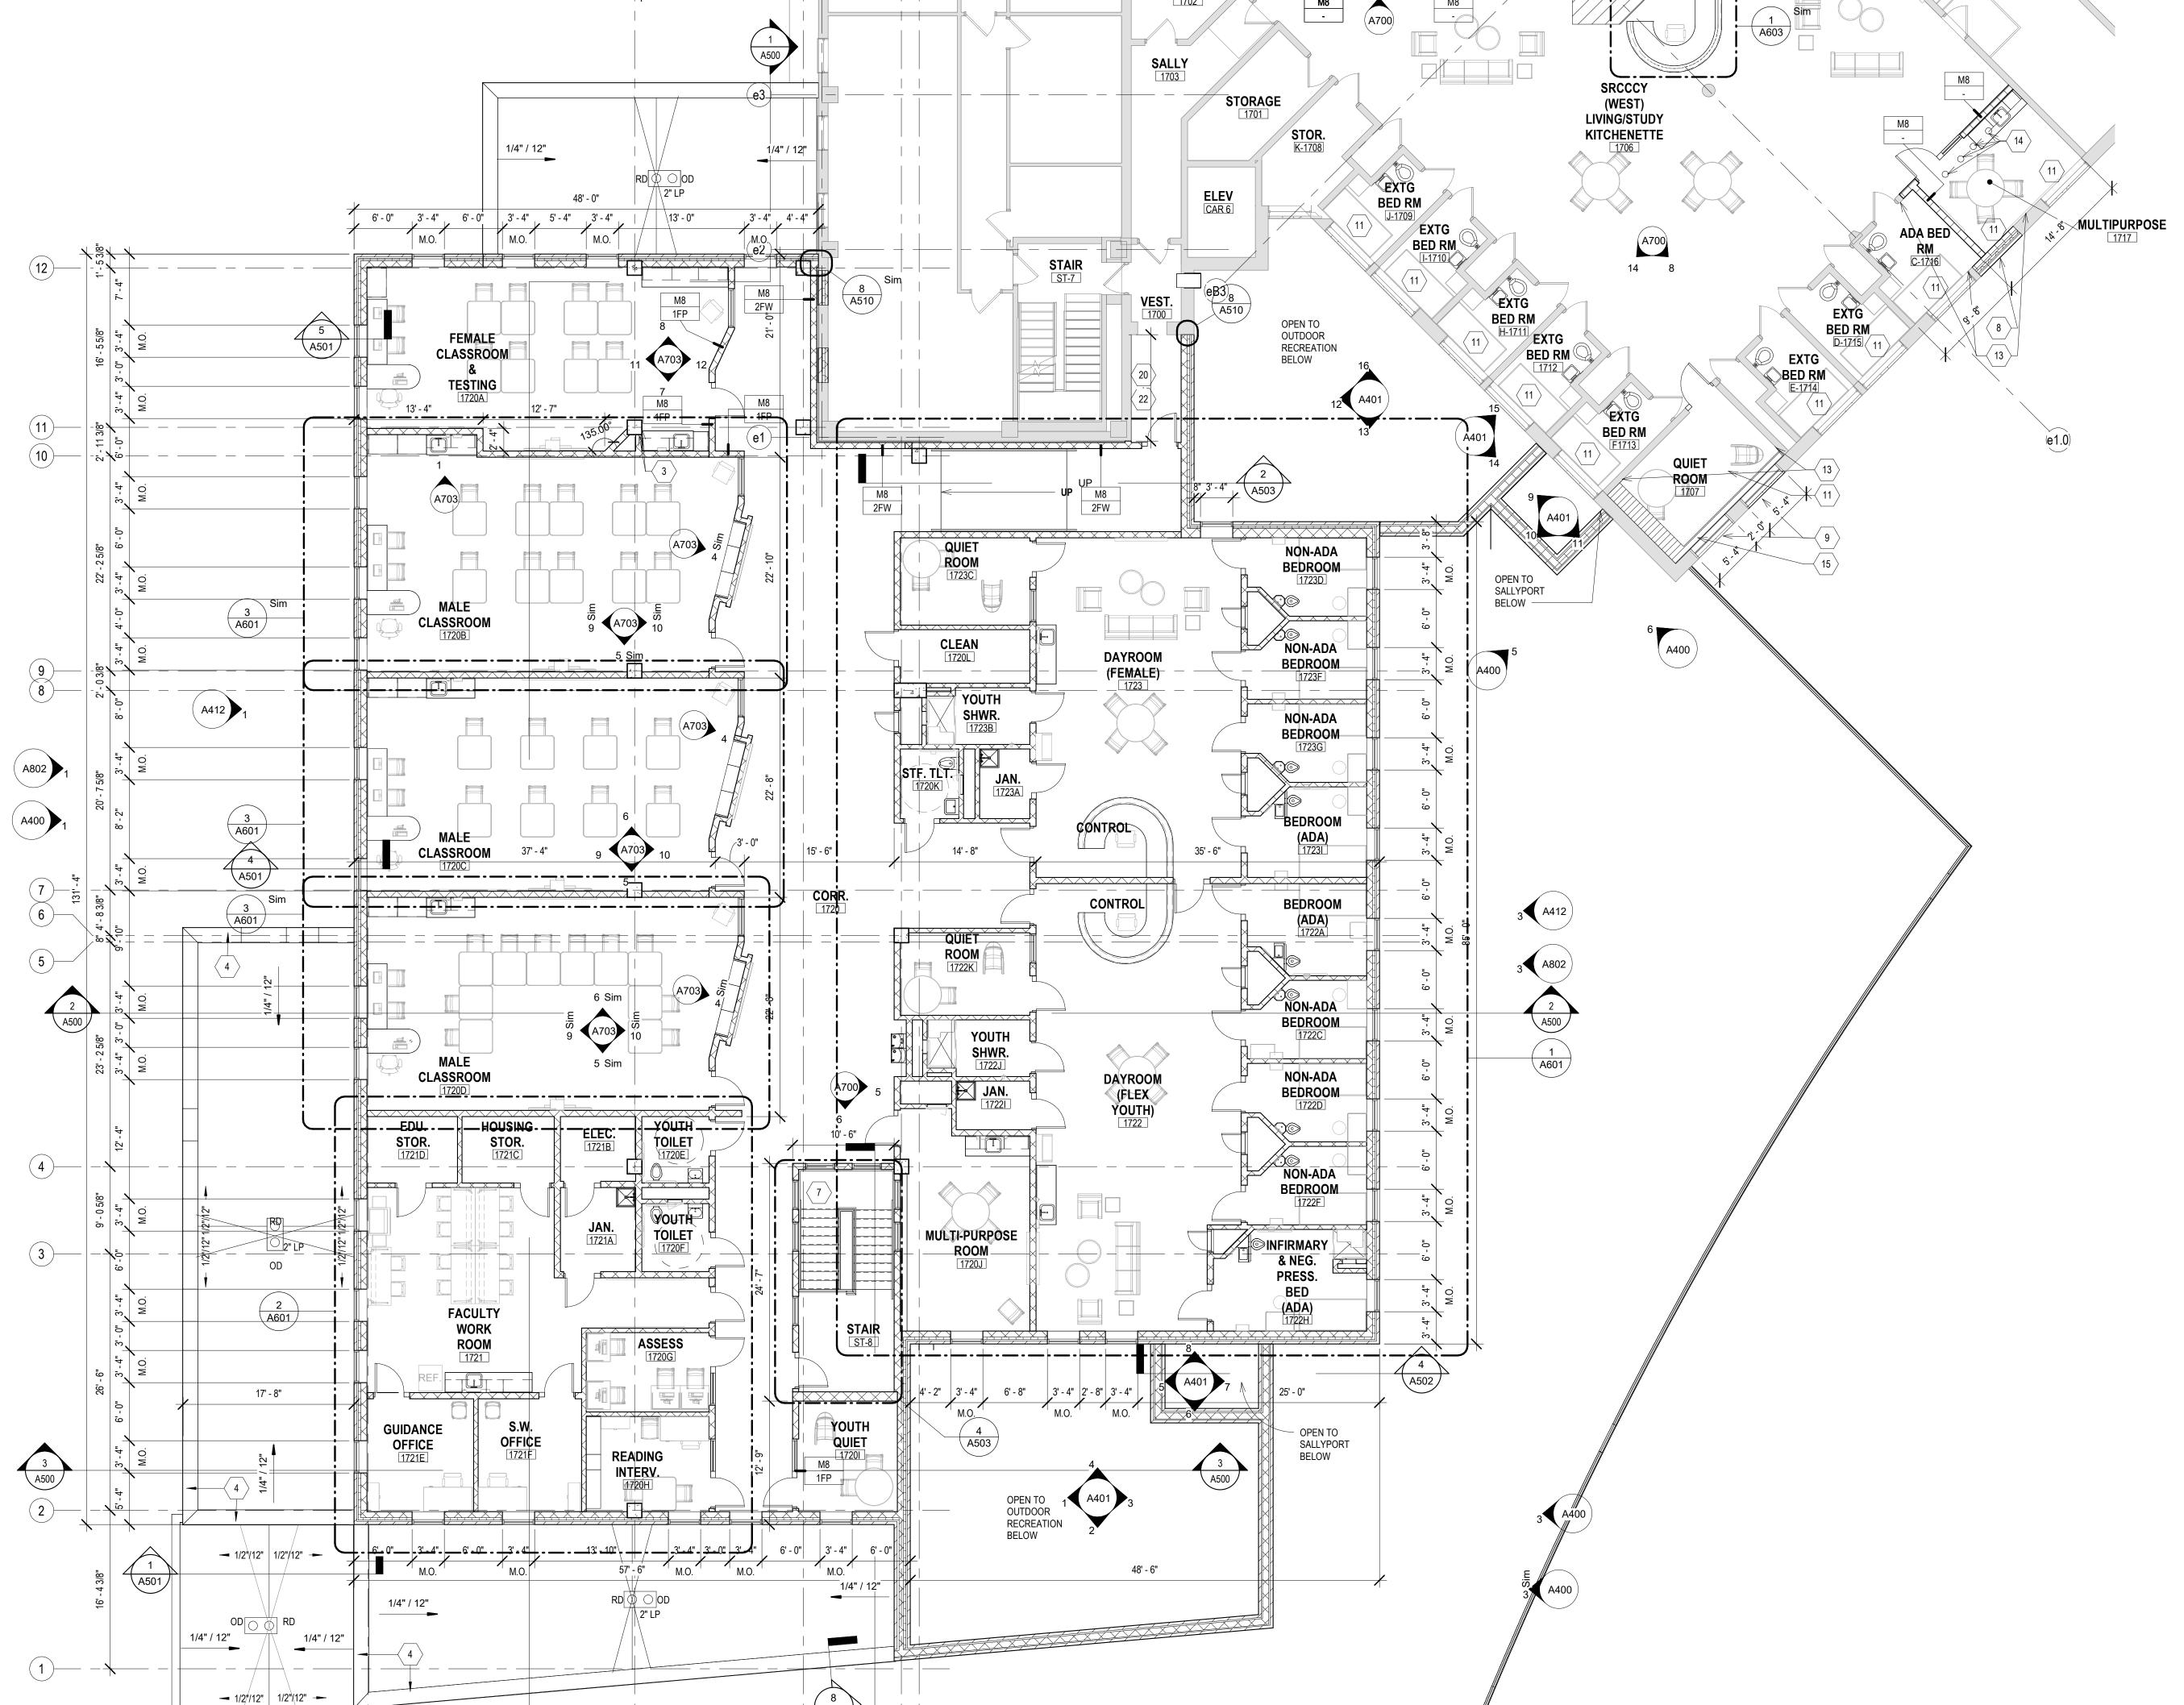

A412

↑ MAIN LEVEL PLAN - AREA B

0' 0.7' 1.3' 2.7' 4'

5' - 8" \ +/- 4' - 4" / 5' - 0"

MECHANICAL

GENERAL FLOOR PLAN NOTES TO CONTRACTOR

- THIS DRAWING IS FURTHER SUPPORTED BY INFORMATION CONTAINED IN THE SPECIFICATION MANUAL. THE CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION, AUDIO-VISUAL, AND SECURITY DRAWINGS ARE SUPPLEMENTARY TO THE ARCHITECTURAL DRAWINGS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE THE INFORMATION CONTAINED IN ALL THE DRAWINGS BEFORE THE INSTALLATION OF ALL
- DO NOT SCALE DRAWINGS. CONTRACTOR TO VERIFY ALL CONDITIONS AND DIMENSIONS AT THE JOB SITE PRIOR TO
- COMMENCING CONSTRUCTION. FLOOR ELEVATIONS ARE TO THE TOP OF THE SUB-FLOOR MATERIAL UNLESS OTHERWISE NOTED. CONTRACTORS SHALL JOINTLY PROVIDE AND INSTALL ALL STIFFENERS, BRACING, BACKING PLATES, WALL BLOCKING AND
- SUPPORTING BRACKETS REQUIRED FOR THE INSTALLATION OF CASEWORK, TOILET ACCESSORIES, PARTITIONS. MILLWORK, AND ALL WORK MOUNTED OR SUSPENDED BY ALL TRADES.

## NEW WORK PLAN LEGEND

EXISTING, TO REMAIN

MASONRY PARTITION, SEE PARTITION TYPES FOR DETAILS

STUD PARTITION, SEE PARTITION TYPES FOR DETAILS

## NEW WORK PLAN KEY NOTES

SEE PROJECT GENERAL CONDITIONS, GENERAL INFORMATION ON SHEET A001 AND SELECTIVE DEMOLITION, CUTTING AND PATCHING SPECIFICATIONS THAT ARE USED IN ASSOCIATION WITH THESE NOTES.

- ALIGN WALLS
- ALIGN FACE OF WALL WITH PRECAST COLUMN
- MOVEABLE PARTITION FIXED IN PLACE EXISTING DOOR LOCKED AND NOT FOR USE
- CONCRETE-FILLED METAL PAN STAIR (90 DEG RISERS) WITH LIGTATURE-RESISTANT STEEL RAILINGS AND STAINLESS STEEL ANTI-MICROBÍAL HANDRAIL. FINISH ALL LANDINGS, TREADS AND RISERS WITH ERF-1. FINISH STEEL STRINGERS AND
- INFILL EXISTING WINDOW OPENINGS ABOVE. SEE INFILL DETAIL. COORDINATE WITH SECURE PERIMETER DETAILS.
- PREFINISHED METEL DETENTION WINDOW ASSEMBLY IN NEW MASONRY OPENING 10 AT EXISTING CONTROL DESK REMOVAL. IF EXISTING FLOORING DID NOT RUN
- UNDER EXISTING CONTROL DESK. CONTRACTOR TO PREPARE EXISTING FLOOR FOR NEW FINISHES. CONTRACTOR TO PATCH FLOORS AND MASONRY WALLS AT EXISTING CONCRETE
- BED OR CONCRETE BENCH REMOVAL AND PREPARE FLOOR FOR NEW FINISHES. REINSTALL SALVAGED TILE AT SAW CUT FLOOR AREA. PATCH ALL EXISTING DISTURBED MASONRY WALL SURFACES THROUGHOUT ROOM TO MATCH EXISTING, AT EXISTING WALL DEMO'D LOCATIONS.
- PATCH ALL EXISTING DISTURBED WALL SURFACES THROUGHOUT ROOM TO MATCH EXISTING, AT EXISTING WALL DEMO'D LOCATIONS. PATCHING REQUIRED AT EXISTING FLOOR ASSEMBLY AT PLUMBING STACK
- REMOVAL AND PLUMBING WATER REMOVAL . COORDINATE WITH PLUMBING CONTRACTOR.
- NEW INFILL FLOOR ASSEMBLY TO MATCH EXISTING FLOOR ASSEMBLY AT EXISTING CHASE LOCATION. COORDINATE WITH PLUMBING CONTRACTOR. 16 INFILL EXISTING DOOR OPENING. SEE INFILL DETAIL. COORDINATE WITH SECURE
- PERIMETER DETAILS. REINSTALL SECURITY SCREEEN AT WINDOW OPENINGS.
- 18 INFILL EXISTING WINDOW, COORDINATE WITH STRUCTURAL AND NEW FLOOR MASON TO TOOTH IN EXISTING MASONRY THAT WAS REMOVED FOR STRUCTURAL
- COORDINATION AT NEW FLOOR LEVEL. COORDINATE WITH STRUCTURAL AND NEW MASON TO TOOTH IN EXISTING MASONRY THAT WAS REMOVED FOR STRUCTURAL
- COORDINATION AT NEW ANGLE AND PLATE LOCATIONS.. COORDINATE WITH STRUCTURAL AND NEW FLOOR PLANS. 2 HOUR FIREPROOFING REQUIRED AT NEW STEEL ANGLE
- RELOCATED EXISTING SHELVING EXISTING GYMNASIUM FLOORING TO BE REFINISHED ANS RESTRIPED AFTER
- TEMPORARY OCCUPNACY
- NEW CONCRETE FLOOR SLAB INFILL AT FLOOR SLAB REMOVAL, MATCH EXISTING CONCRETE SLAB


360


BUILDING NO:
5000


CAP PROJECT #:
180802


PROJECT STATUS: 50% CD REVIEW SET


A203

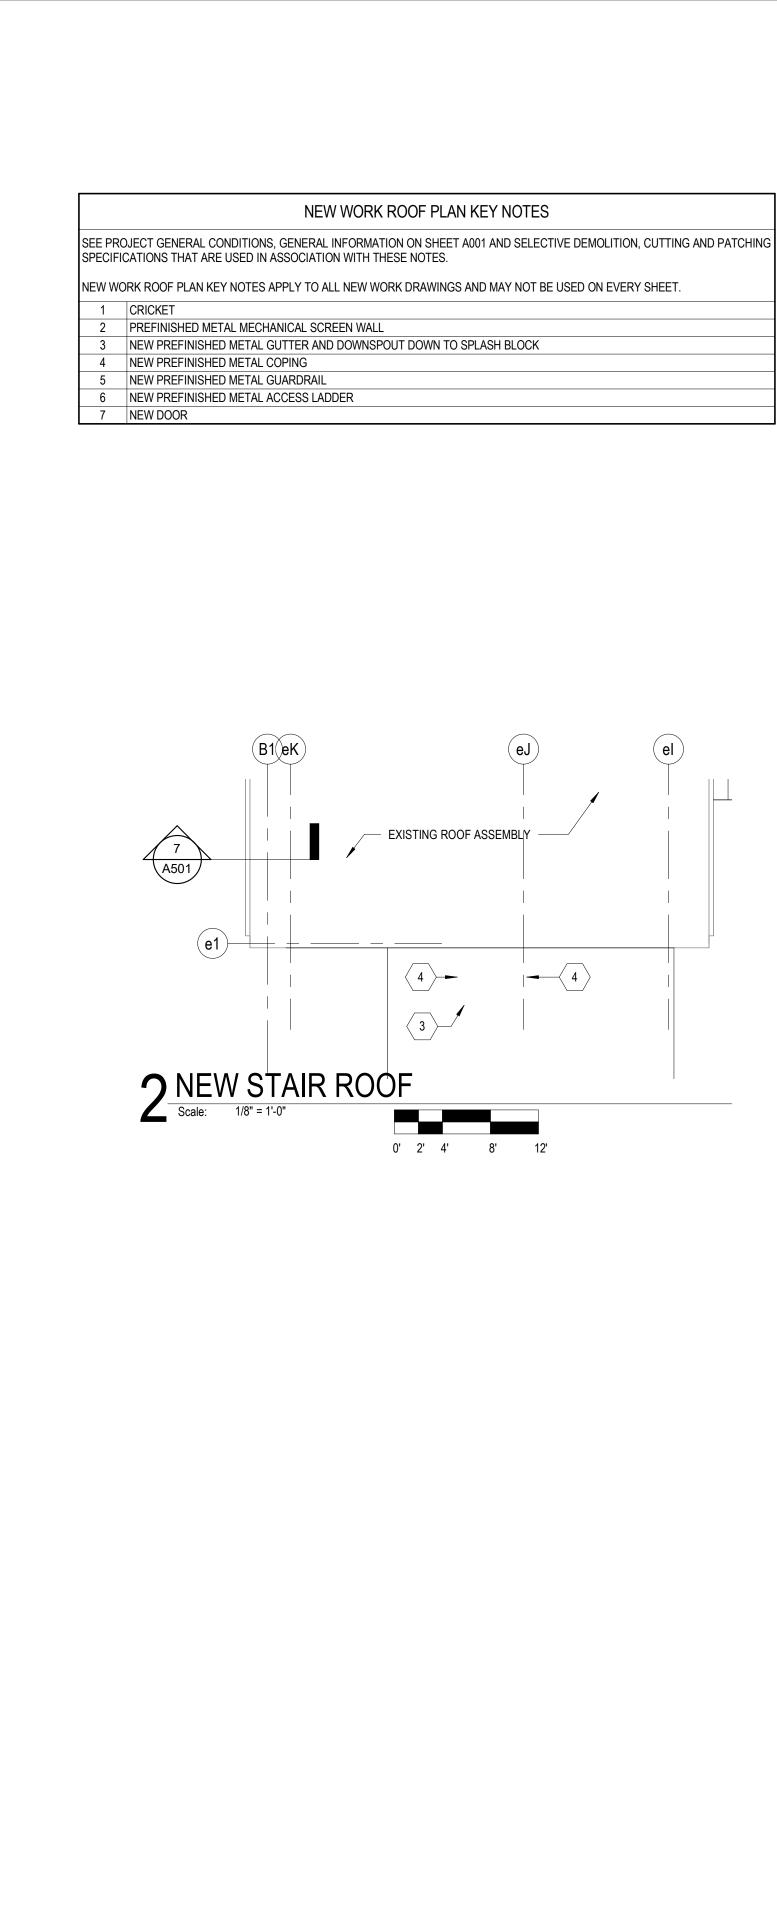

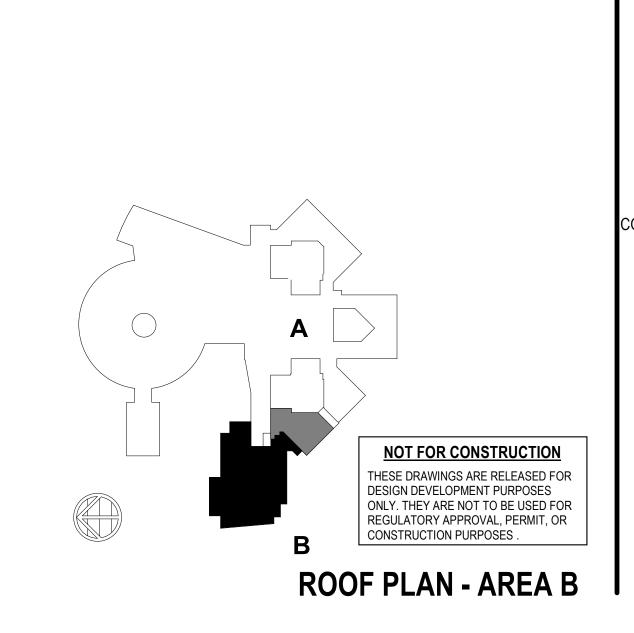

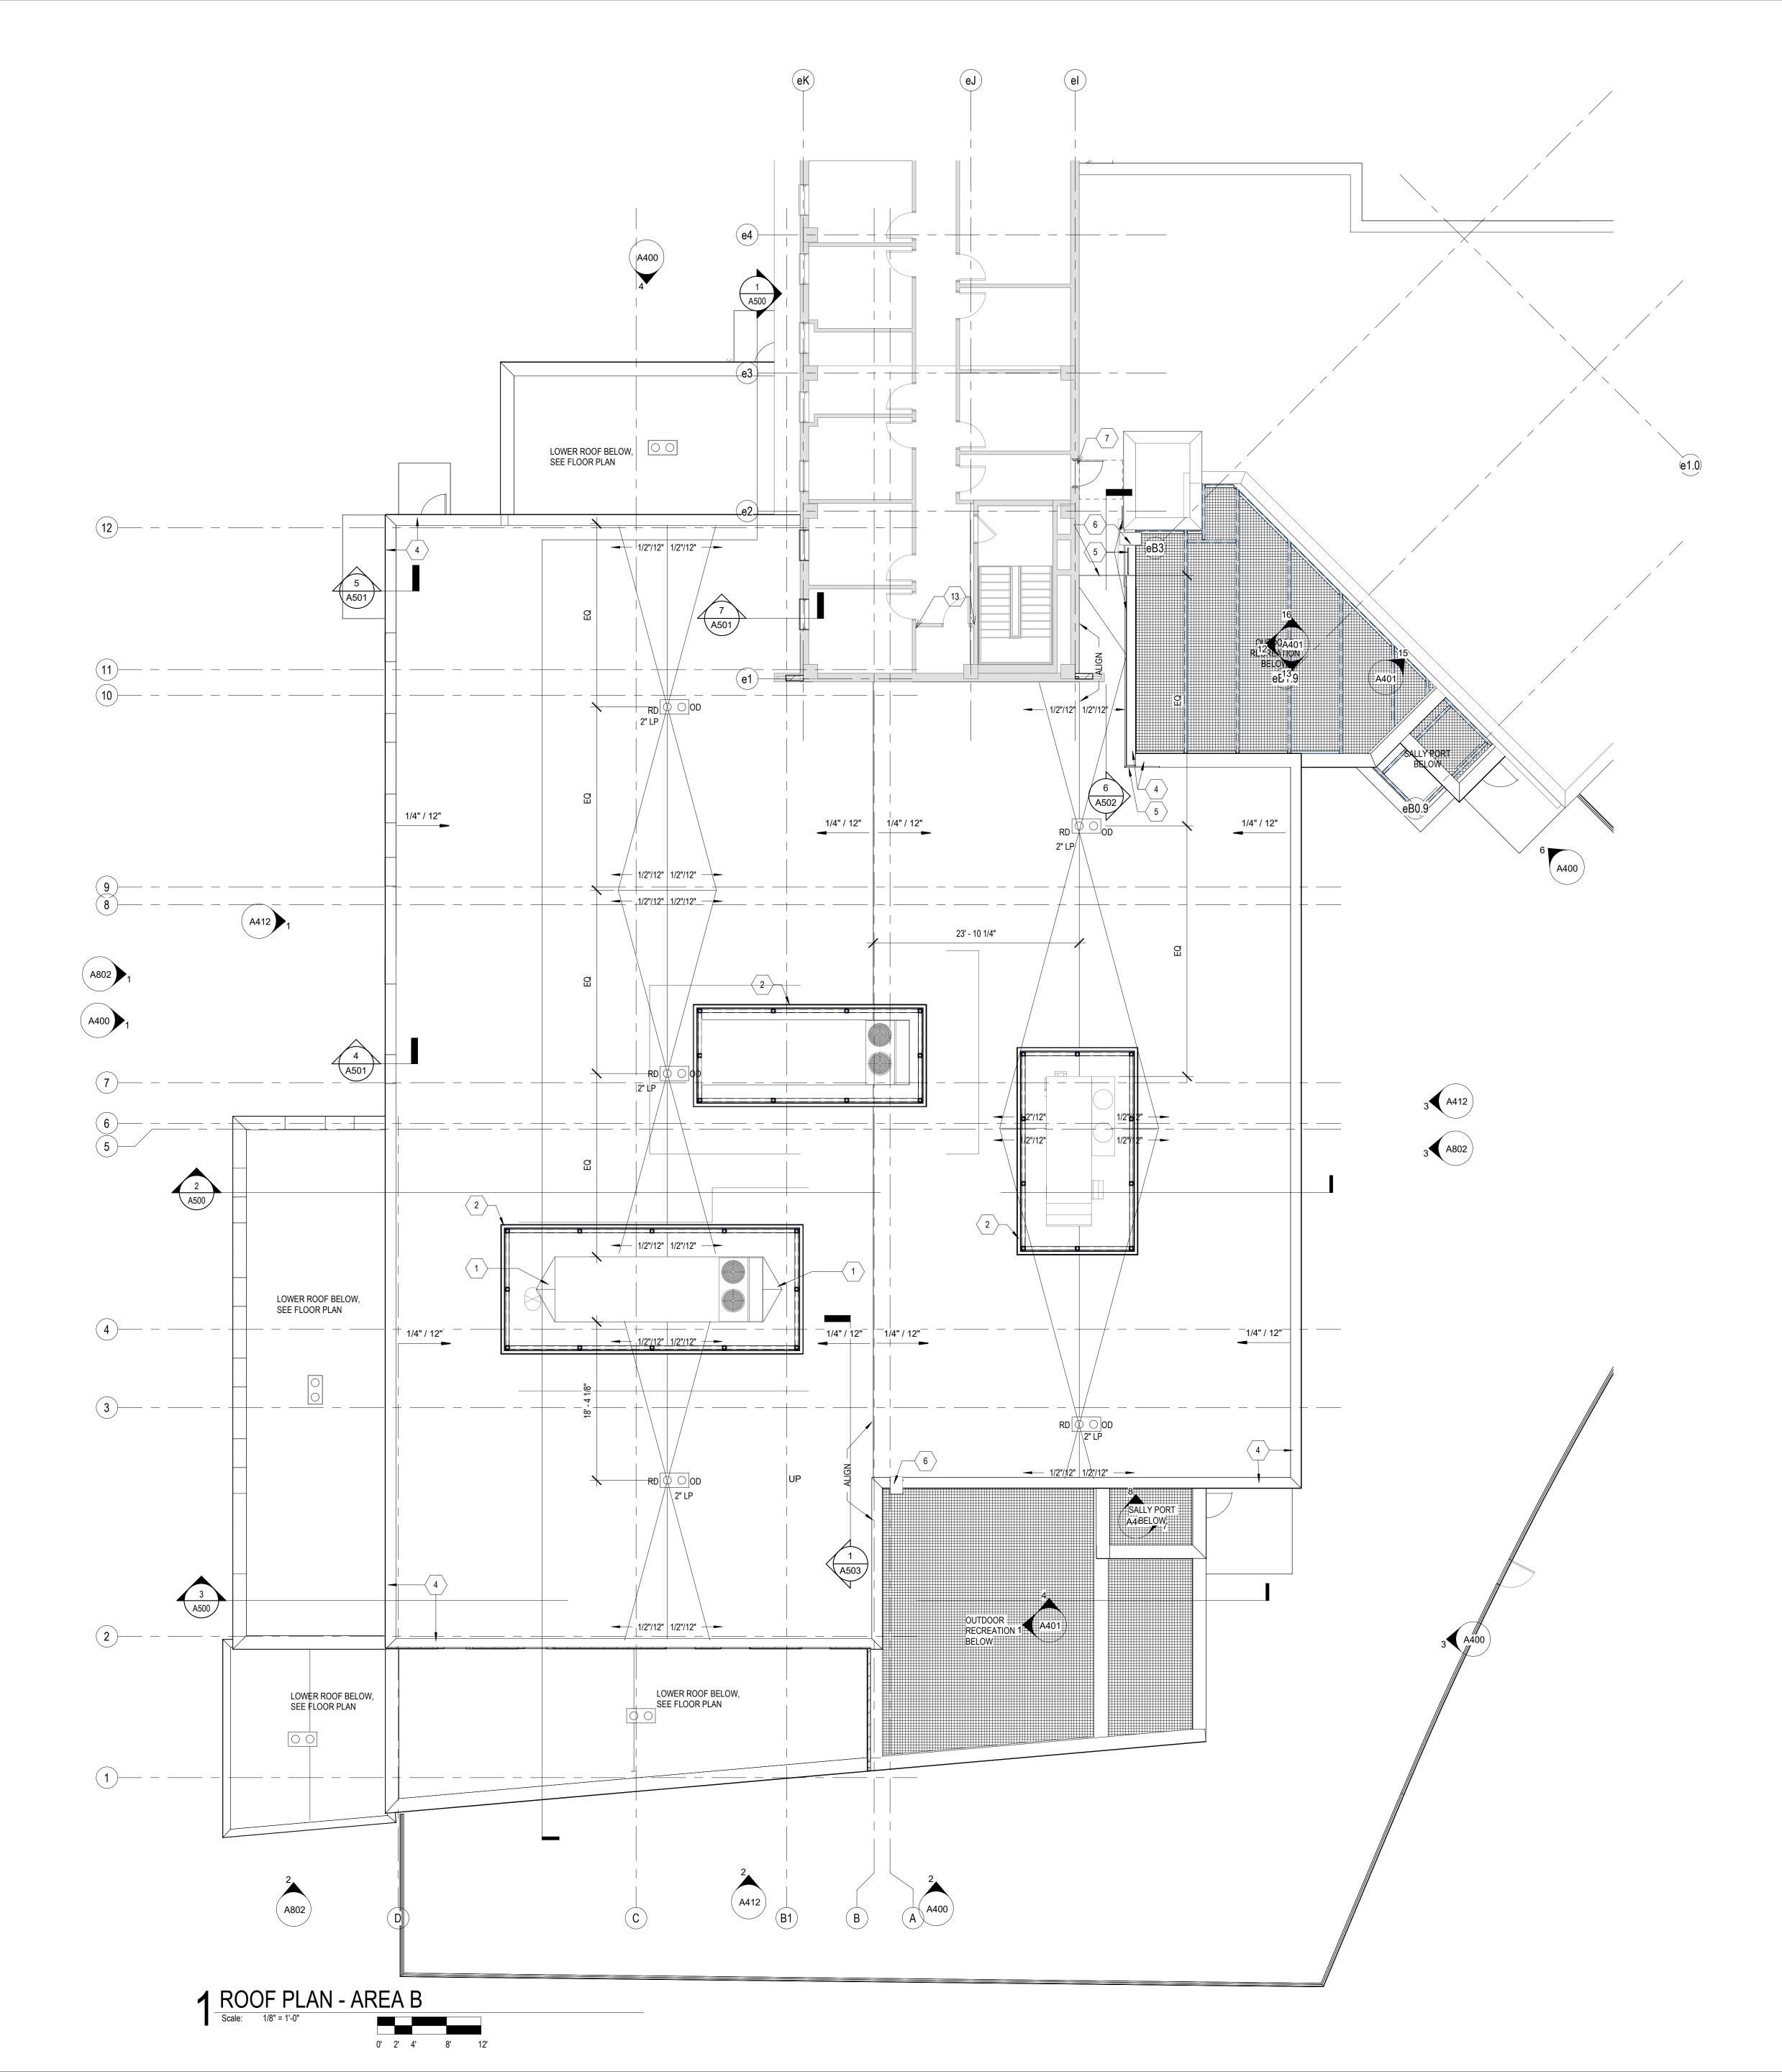

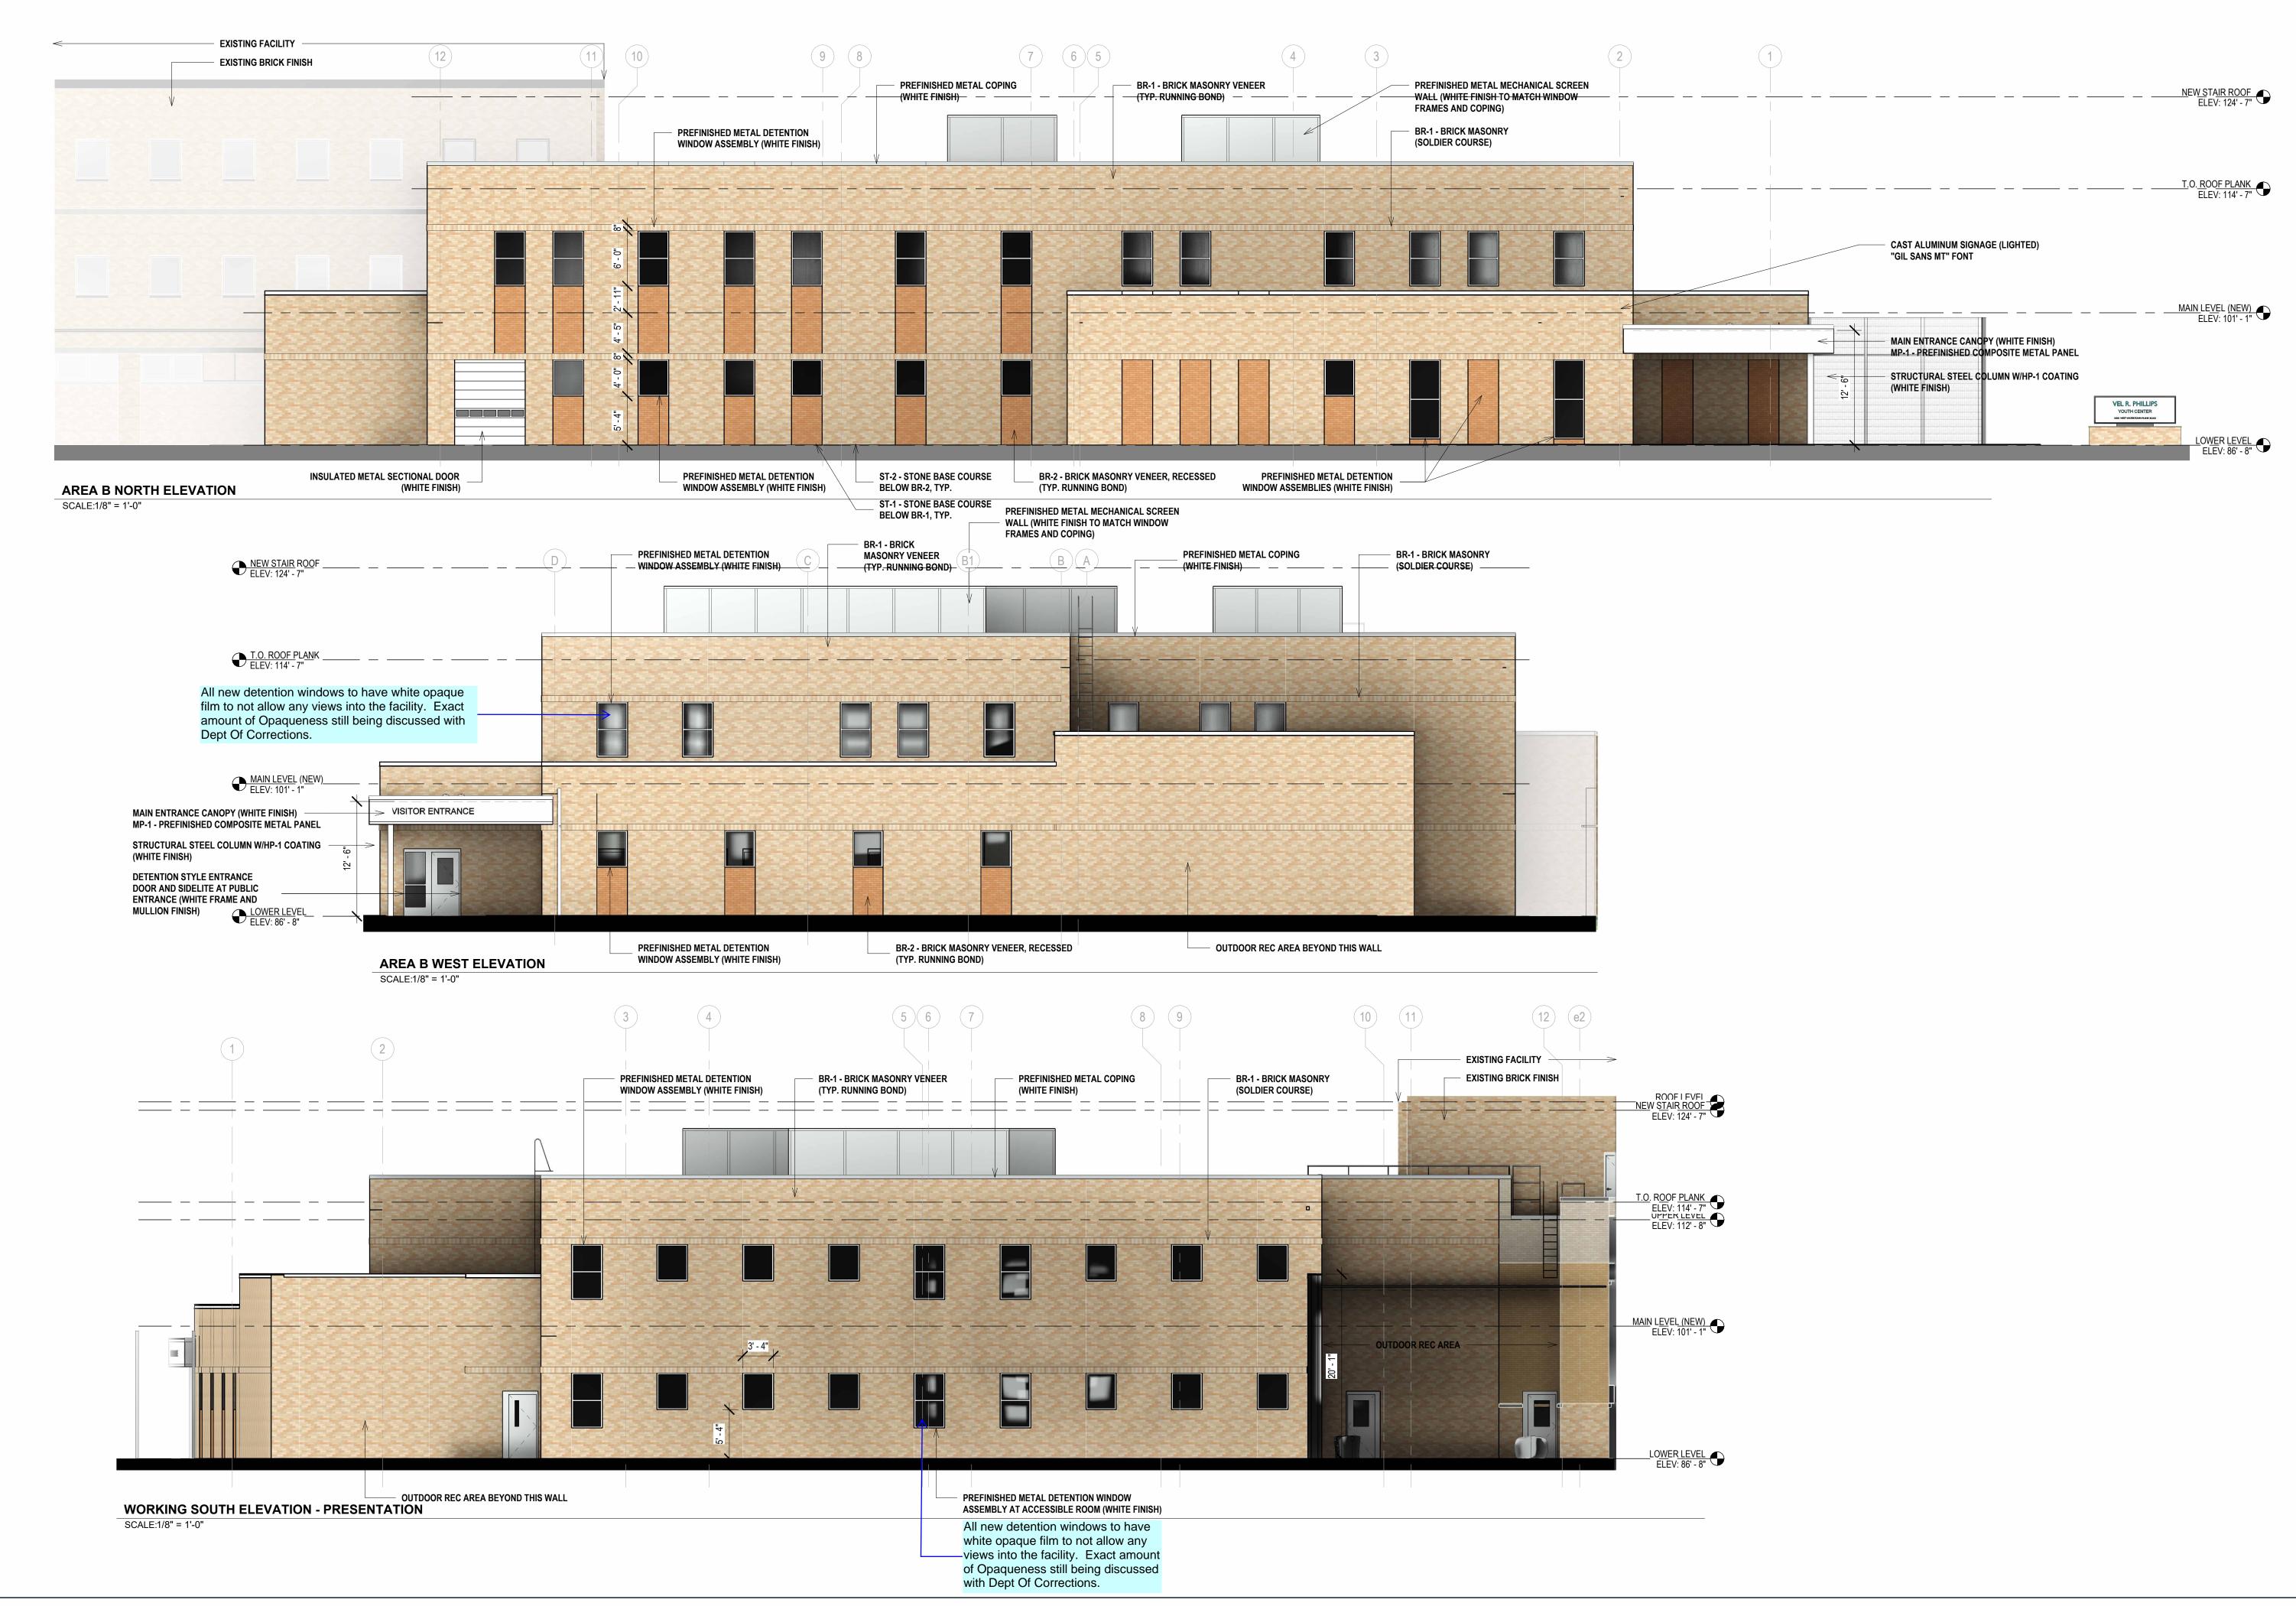

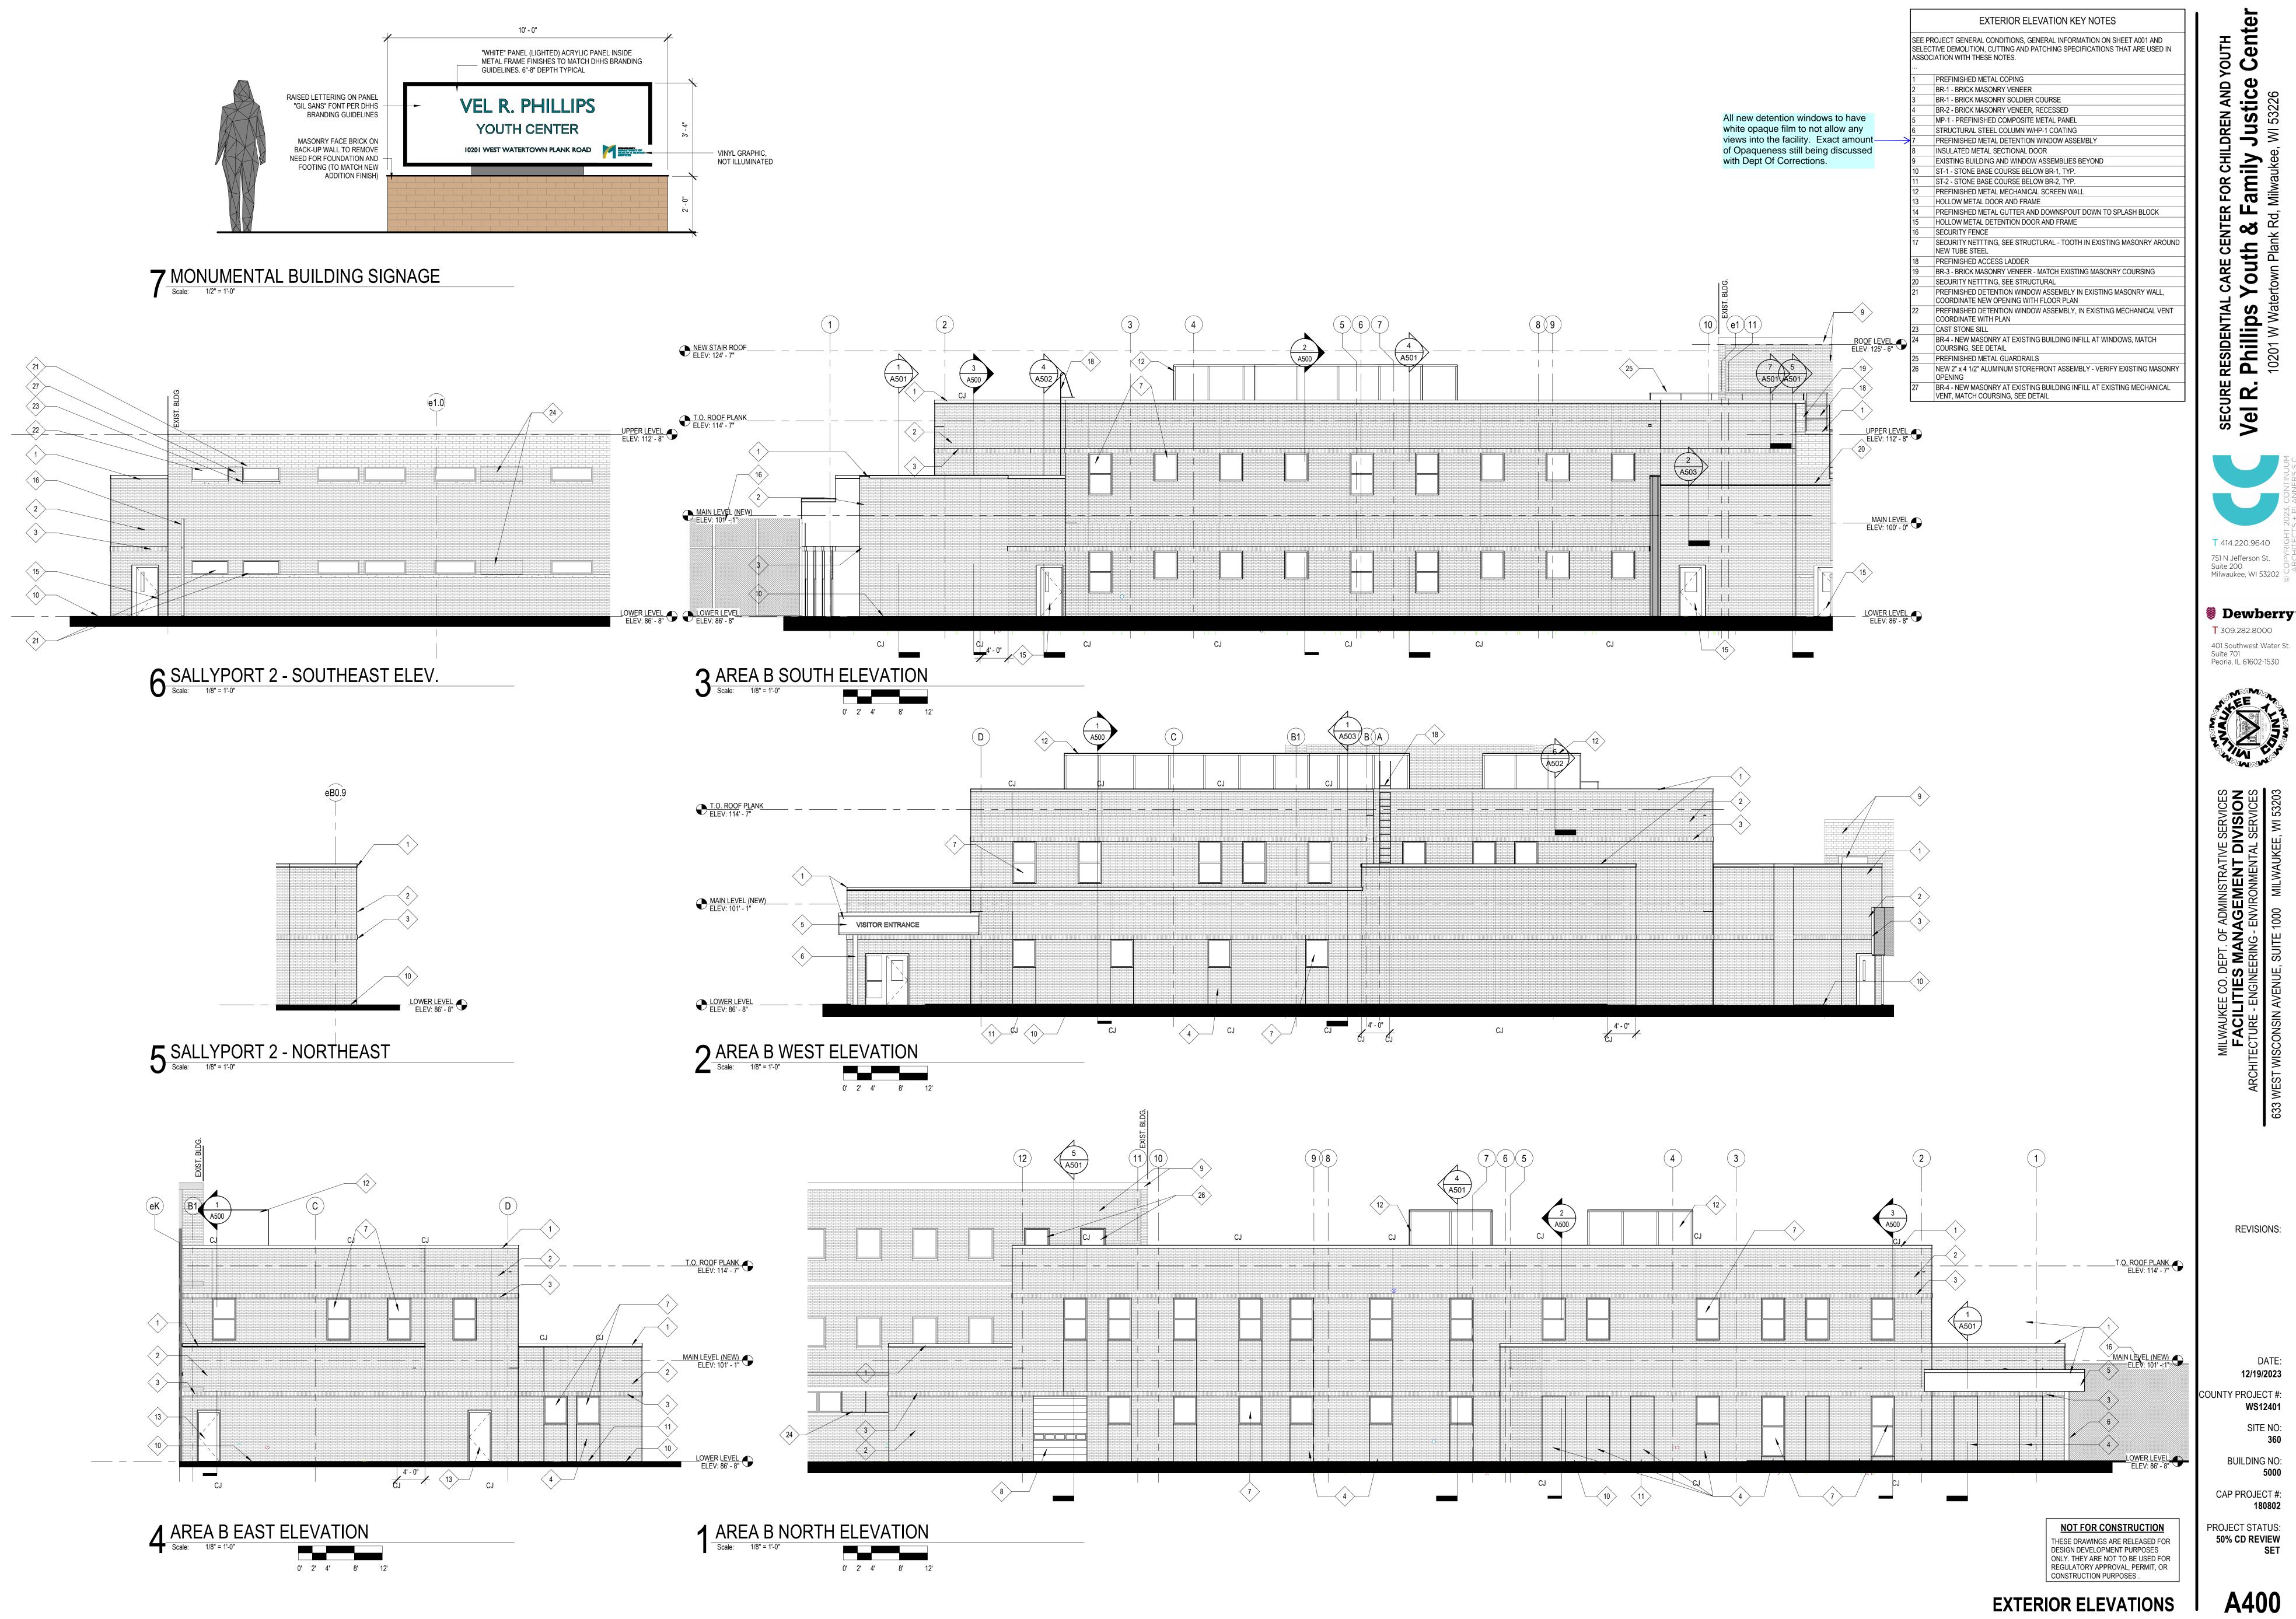

12/19/2023 SITE NO: **BUILDING NO:** 



www.nebronbrick.com

BR-1 is the mixture of all the brick colors.



7200 S. 10<sup>™</sup> STREET OAK CREEK, WI 53154 414 764-8700

